




PNR03S Series

5W, Open Frame, AC/DC Converters

WinkEE

Features

- ▶ Rated power: 3W Max
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Regulated single output
- ▶ Isolation voltage 4000VAC
- ▶ Typical efficiency 68 ... 81%
- ▶ Energy saving, standby power only less than 0.1W
- ▶ Operating temperature range: -40~+85°C
- ▶ RoHS compliance
- ▶ Compact SIP package
- ▶ Over voltage, over current and short circuit protection
- ▶ Certified to UL/EN/IEC 62368-1, CISPR32, EN55032 Class B Meet EN 60335-1, EN 61558-1
- ▶ Designed for both civil and industrial applications
- ▶ 5 year warranty

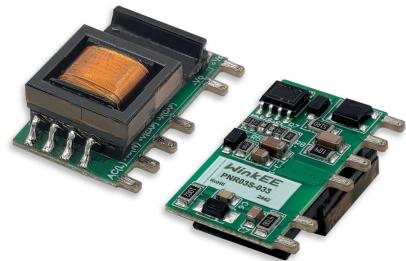

RoHS **CE** **c** **UL** **us**

Overview

PNR03S series are compact size AC/DC power converters, featuring universal input voltage range 85~305VAC, low standby power consumption, high efficiency. They are certified to UL/EN/IEC 62368-1, and EMC performance meets CISPR32, EN55032 Class B, ideally suitable for industrial, and critical commercial applications.

Model Numbers

| Model Number | Input Voltage [VAC] | Output Voltage [VDC] | Output Current [mA] Max. | Efficiency [%] Typ. | Capacitive Load [uF] Max. |
|--------------------------------|-------------------------|----------------------|--------------------------|---------------------|---------------------------|
| PNR03S-033 [1] | 85~305VAC 100~430VDC | 3.3 | 600 | 68 | 1500 |
| PNR03S-050 [1] | | 5 | 600 | 73 | 1500 |
| PNR03S-075 [1] | | 7.5 | 400 | 75 | 680 |
| PNR03S-090 [1] | | 9 | 340 | 77 | 680 |
| PNR03S-120 [1] | | 12 | 250 | 77 | 470 |
| PNR03S-150 [1] | | 15 | 200 | 78 | 330 |
| PNR03S-180 | | 18 | 167 | 80 | 330 |
| PNR03S-240 [1] | | 24 | 125 | 81 | 100 |

Note [\[1\]](#): Models that are certified to UL62368-1.



Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load.

| Parameters | Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|--|---------------------------------|------------|------|---------------------|
| Input voltage range | AC in | 85 | - | 305 | VAC |
| | DC in | 100 | - | 430 | VDC |
| Input frequency | | 47 | - | 63 | Hz |
| Nominal input voltage | | 100 | - | 277 | VAC |
| Input current | 115VAC | - | - | 0.15 | |
| | 230VAC | - | - | 0.07 | A |
| Inrush current Cold start | 115VAC | - | 20 | - | |
| | 230VAC | - | 40 | - | A |
| Output voltage accuracy | $I_{\text{OUT}}=10\% \sim 100\% \text{ of } I_{\text{OUT, rated}}$ | - | ± 5 | - | % |
| Line regulation Full load | $V_{\text{OUT}}=3.3\text{V}$ | - | ± 2.5 | - | |
| | Others | - | ± 1.5 | - | % |
| Load regulation | $I_{\text{OUT}}=10\% \sim 100\% \text{ of } I_{\text{OUT, rated}}$ | - | ± 3 | - | % |
| Ripple and noise [2] | 20MHz bandwidth | - | 80 | 150 | mVp-p |
| Temperature coefficient | | - | ± 0.15 | - | $^\circ\text{C}$ |
| Standby power consumption | | - | 0.10 | - | W |
| Hold up time Full load | 115VAC | - | 8 | - | |
| | 230VAC | - | 40 | - | ms |
| Minimum load | | 10 | - | - | $\% I_{\text{OUT}}$ |
| Over current protection | Automatic recovery | 110 | - | - | $\% I_{\text{OUT}}$ |
| Short circuit protection | | Hiccup mode, automatic recovery | | | |
| External fuse | | 1A, slow blow *required* | | | |

Note [2]: Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.




General Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Unit |
|--|----------------------|--|------|------|-------|
| Isolation voltage Tested for 1 minute | I/P to O/P | 4000 | - | - | VAC |
| Isolation resistance 500VDC, 25°C, 70%RH | I/P to O/P | 100 | - | - | M Ohm |
| Switching frequency | | - | 65 | - | KHz |
| Operating temperature range | See "Derating Curve" | -40 | - | 85 | °C |
| Storage temperature | | -40 | - | 105 | °C |
| Storage humidity | | 10 | - | 95 | %RH |
| Soldering temperature | | - | 260 | - | °C |
| Cooling method | | Free air convection | | | |
| Safety class | | Class II | | | |
| MTBF | MIL-HDBK-217F | > 1,000,000 Hours, 25°C | | | |
| Safety standards | | UL/EN/IEC 62368-1, UKCA, EN 60335-1, EN 61558-1 | | | |
| EMC standards | CISPR32, EN55032 | Class A with External Circuit "Figure 1" [A] Class B with External Circuit "Figure 2" [B] | | | |
| ESD | IEC/EN61000-4-2 | Contact ±6kV, Air ±8kV, perf. Criteria B | | | |
| Radiated | IEC/EN61000-4-3 | 10V/m, perf. Criteria A | | | |
| EFT, Burst | IEC/EN61000-4-4 | ±2kV, perf. Criteria B [A] ±4kV, perf. Criteria B [B] | | | |
| Surge | IEC/EN61000-4-5 | Line to Line ±1kV, perf. Criteria B [A] Line to Line ±2kV, perf. Criteria B [B] | | | |
| Conducted | IEC/EN61000-4-6 | 10Vrms, perf. Criteria A | | | |
| Size, and Weight | | 26.4x11.0x14.8mm, 5g | | | |

Characteristic Curves

Derating Curves

Output vs Ambient Temperature

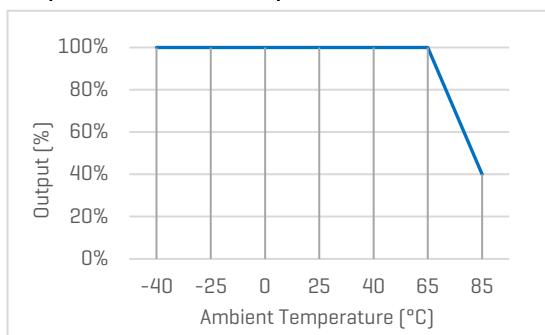

5W, Open Frame, AC/DC Converters

Recommended External Circuits

Typical External Circuit for EN55032 Class A

This circuit is the basic design reference, components with "" are required for the converter's operating.

FUSE to be 1A, slow blow and **R1*** to be 12 Ohm 3W, both are required for safety.

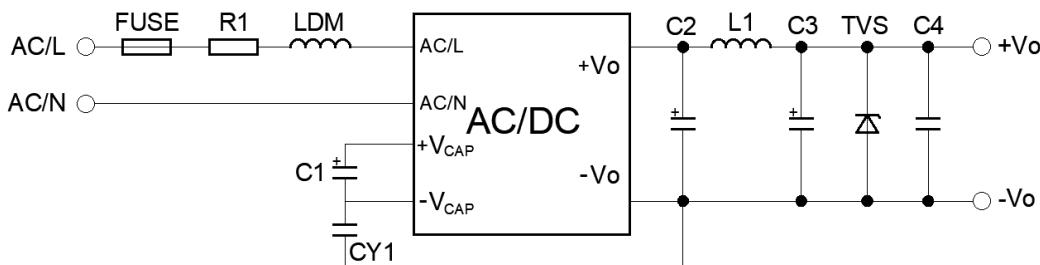


Figure 1. Typical external circuit

Recommended Component Spec [Table 1]

| V _{out} [V] | C1* | C2* | C3* | C4 | CY1* | L1* | TVS |
|----------------------|------------|------------|------------|------------|-------------|-----------|----------|
| 3.3, 5 | 10uF, 450V | 560uF, 16V | 100uF, 35V | 0.1uF, 50V | 1nF, 400VAC | 2.2uH, 3A | SMBJ7.0A |
| 9, 12 | 10uF, 450V | 330uF, 25V | 100uF, 35V | 0.1uF, 50V | 1nF, 400VAC | 2.2uH, 3A | SMBJ12A |
| 15, 24 | 10uF, 450V | 330uF, 35V | 47uF, 35V | 0.1uF, 50V | 1nF, 400VAC | 3.3uH, 2A | SMBJ20A |

EMC Enhancement for EN55032 Class B

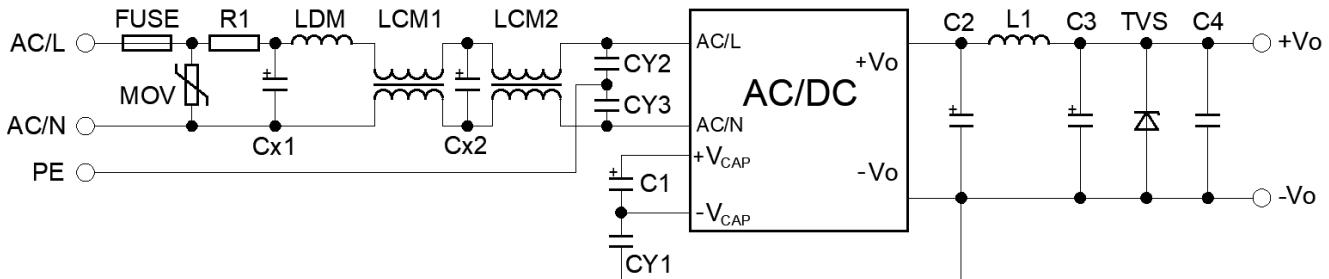


Figure 2. Circuit for EMC Enhancement

Recommended Component Spec [Table 2]


| Item | FUSE* | MOV | Cx1, Cx2 | LDM | LCM1 | LCM2 | CY1, CY2, CY3 |
|------|----------|--------|---------------|-------|-------|--------|---------------|
| Spec | 2A, 300V | 14D561 | 0.1uF, 310VAC | 2.2mH | 200uH | 12.6mH | 1nF, 400VAC |

Components above with "" are required for the converter's operating.

*Refer to Table 1 for other components that not shown in Table 2

Mechanical Specifications

Default Package

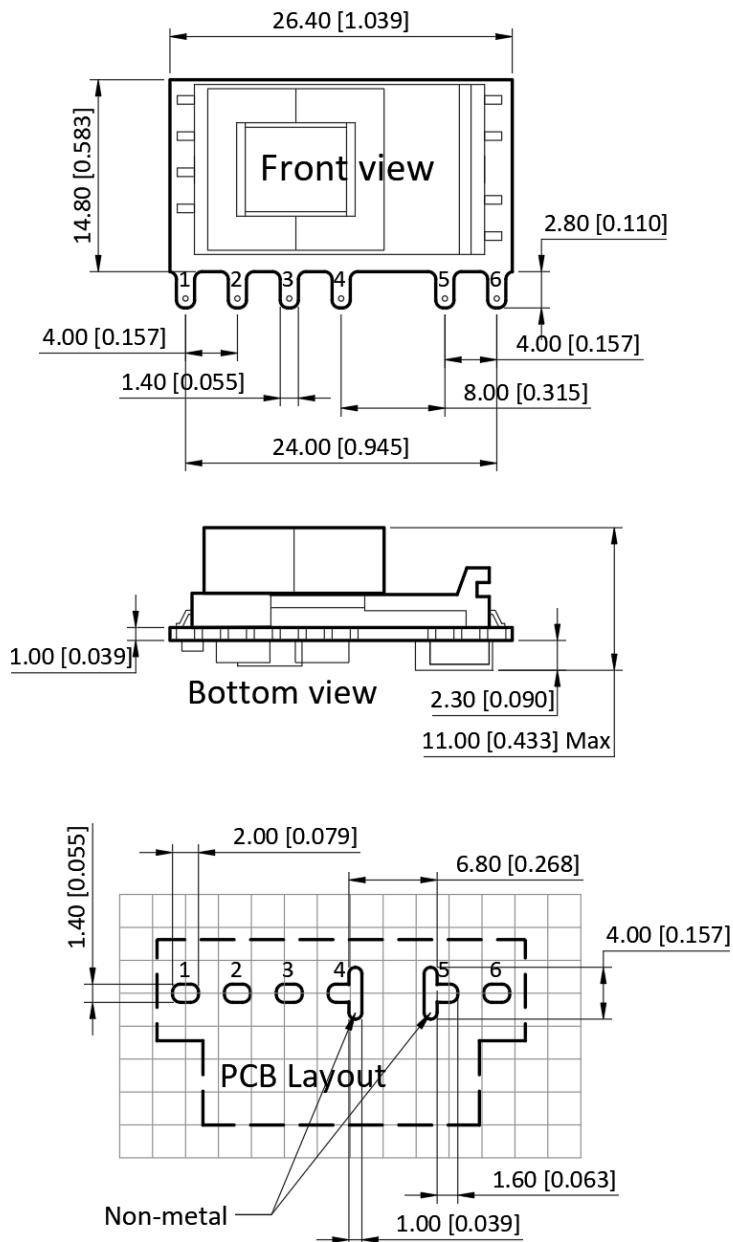

Pin Definition

| Pin # | Single Out |
|-------|-------------------|
| 1 | AC [L] |
| 2 | AC [N] |
| 3 | +V [CAP] |
| 4 | -V [CAP] |
| 5 | -V _{OUT} |
| 6 | +V _{OUT} |

* Unless otherwise specified unit: mm [inch]

* General tolerance: ± 1.00 [± 0.040]

* Pin thickness: ± 0.15 [± 0.006]

* Pin distance: ± 0.50 [± 0.020]

* Footprint grid 2.54 x 2.54 mm