



# PMR15DS Series

15W, Encapsulated, AC/DC Converters

**WinkEE**

## Features

- ▶ Rated power: 15W Max
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Regulated single output
- ▶ Isolation voltage 4000VAC
- ▶ Typical efficiency 81 ... 87%
- ▶ Energy saving, standby power only about 0.1W
- ▶ Operating temperature range: -40~+85 C
- ▶ RoHS compliance
- ▶ Compact DIP package
- ▶ Over voltage, over current and short circuit protection
- ▶ Certified to UL/EN/IEC 62368-1, OVC II, EN60335-1, EN61558-1, FCC, UKCA, CISPR32, EN55032 Class B with NO externals
- ▶ 5 year warranty



RoHS

\*UL Certification is process

## Overview

PMR15DS series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They meet IEC/EN/UL62368-1, OVC II, EN60335-1, EN61558-1, FCC, UKCA and EMC performance meets CISPR32, EN55032 Class B without support from any external components, ideally suitable for industrial, and critical commercial applications.

## Mode Numbers

Model Number	Input Voltage [VAC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
PMR15DS-033	85~305VAC 100~430VDC	3.3	4000	81	6600
PMR15DS-050		5	3000	83	5000
PMR15DS-090		9	1670	84	3000
PMR15DS-120		12	1250	86	2000
PMR15DS-150		15	1000	86	1000
PMR15DS-240		24	625	87	680

\* Only typical models are listed, other models may be available, upon request.



## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^\circ\text{C}$ , humidity<75%, nominal input voltage and rated output load.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input voltage range	AC in DC in	85 100	-	305 430	VAC VDC
Input frequency		47	-	63	Hz
Nominal input voltage		100	-	277	VAC
Input current	115VAC 230VAC	-	-	0.45 0.30	A
Inrush current	115VAC Cold start	-	30 60	-	A
Leakage current	277VAC, 50Hz	-	-	0.1	mA RMS
Output voltage accuracy		-	$\pm 3$	-	%
Line regulation	Full load	-	$\pm 0.5$	-	%
Load regulation	$I_{\text{OUT}}=0\% \sim 100\% \text{ of } I_{\text{OUT, rated}}$	-	$\pm 1.0$	-	%
Ripple and noise [2]	20MHz bandwidth	-	80	150	mVp-p
Temperature coefficient		-	$\pm 0.02$	-	$^\circ\text{C}$
Standby power consumption		-	0.10	-	W
Hold up time	115VAC Full load	-	10 55	-	ms
Over voltage protection	$V_{\text{OUT}}=3.3, 5\text{V}$ Hiccup or clamping by zener diode	-	-	7.5 15 20 30	VDC
Over current protection	Automatic recovery	110	-	-	$\% I_{\text{OUT}}$
Short circuit protection		Hiccup mode, automatic recovery			
Minimum load		No minimum load is required			
Recommended external fuse		2A, 300V slow blow *required*			

Note [2]: Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.



## General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
<b>Isolation voltage</b> Tested for 1 minute	I/P to O/P	4000	-	-	VAC
<b>Isolation resistance</b> 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm
<b>Switching frequency</b>		-	65	-	KHz
<b>Operating temperature range</b>	See "Derating Curve"	-40	-	85	°C
<b>Storage temperature</b>		-40	-	105	°C
<b>Storage humidity</b>		10	-	95	%RH
<b>Maximum case temperature</b>		-	-	95	°C
<b>Operating altitude</b>	See "Derating Curve"	-	-	5000	m
<b>Soldering temperature</b>	5 seconds	-	260	-	°C
<b>Case material</b>		Black plastic UL94-VO			
<b>Cooling method</b>		Free air convection			
<b>Vibration</b>		10Hz to 55Hz, 5G, 30 minutes along X, Y and Z axis			
<b>MTBF</b>	MIL-HDBK-217F	> 1,500,000 Hours, 25°C			
<b>Overvoltage category</b>	EN IEC 62368	OVC III			
<b>Safety class</b>		Class II			
<b>Safety standards</b>		UL/EN/IEC 62368-1, UKCA, EN 60335-1, EN 61558-1			
<b>EMC standards</b>	CISPR32, EN55032	Class B with "NO External Circuit"			
<b>ESD</b>	IEC/EN61000-4-2	Contact ±6kV, Air ±8kV, perf. Criteria B			
<b>Radiated</b>	IEC/EN61000-4-3	10V/m, perf. Criteria A			
<b>EFT, Burst</b>	IEC/EN61000-4-4	±1kV, perf. Criteria B <sup>[3]</sup> ±2kV, perf. Criteria B <sup>[4]</sup>			
<b>Surge</b>	IEC/EN61000-4-5	Line to Line ±1kV, perf. Criteria B <sup>[3]</sup> Line to Line ±2kV, perf. Criteria B <sup>[4]</sup>			
<b>Conducted</b>	IEC/EN61000-4-6	3Vrms, perf. Criteria A			
<b>Voltage dips and interruptions</b>	IEC/EN 61000-4-11	0%, 70%, perf. Criteria B			
<b>Size, and Weight</b>		45.7x25.4x21.5mm, 40g			
<b>Packing info</b>	210 PCS/Carton	Size: 405x370x265mm, G.W. 10Kg Typ.			

Note <sup>[3]</sup>: with External Circuit Figure 1,Note <sup>[4]</sup>: with External Circuit Figure 2



# PMR15DS Series

**WinkEE**


15W, Encapsulated, AC/DC Converters

## Characteristic Curves


### Derating Curves

#### Output vs Ambient Temperature


$V_{OUT}=3.3, 5V$

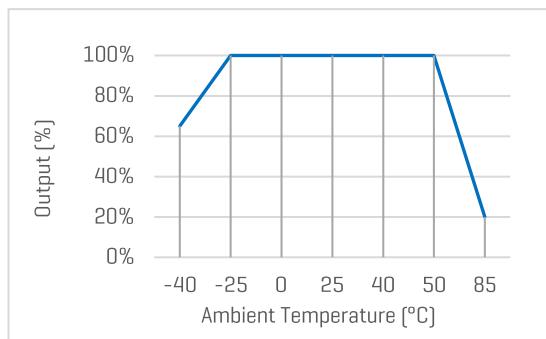


$V_{OUT}=9 \dots 24V$

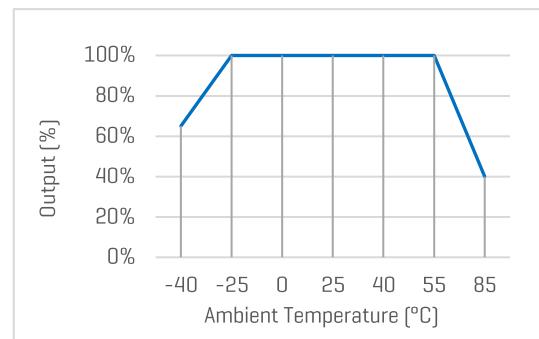

#### Output vs Input Voltage

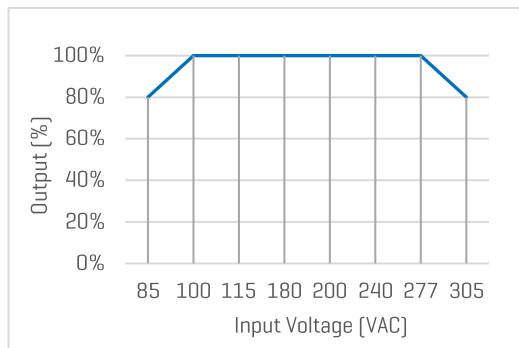


#### Output vs Altitude

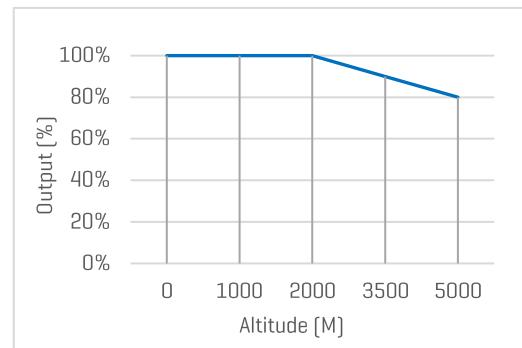


### Efficiency Curves

#### Efficiency vs Input Voltage

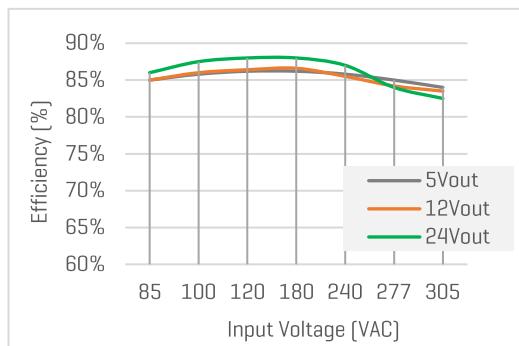

#### Efficiency vs Load

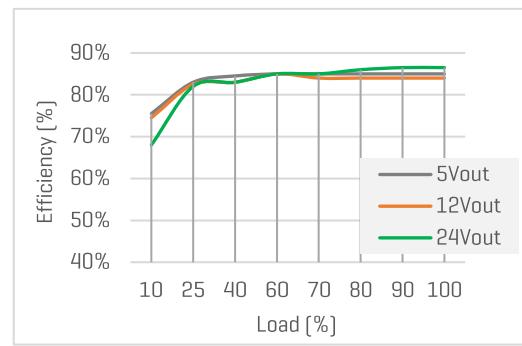



## Recommended External Circuits

### Typical External Circuit

\*Components with “\*” are required. The other components are highly recommended.

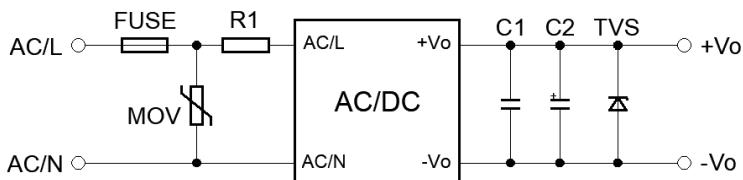


Figure 1. Typical external circuit

### Recommended Components [Table 1]

SPEC	FUSE*	MOV	R1*	C1	C2	TVS
V <sub>OUT</sub> =3.3, 5V	2A, 300V	14D561K	6.8 Ohm, 3W	1uF, 50V	220uF, 10V	SMBJ7.0A
V <sub>OUT</sub> =9, 12V	2A, 300V	14D561K	6.8 Ohm, 3W	1uF, 50V	100uF, 25V	SMBJ15A
V <sub>OUT</sub> =15V	2A, 300V	14D561K	6.8 Ohm, 3W	1uF, 50V	100uF, 25V	SMBJ20A
V <sub>OUT</sub> =24V	2A, 300V	14D561K	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ30A

\* For further questions contact one of our sales representatives.

### EMC Enhancement for EN55032 Class B

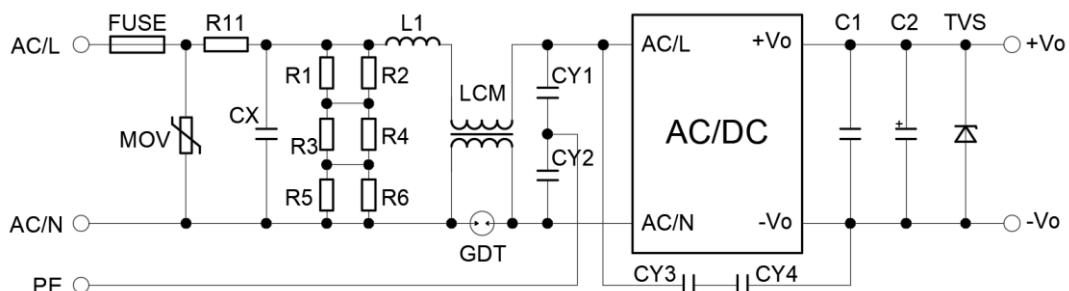


Figure 2. Circuit for EMC Enhancement

### [Table 2] Recommended Components

MOV	CX	R11*	L1	LCM	GDT	CY1, CY2	CY3, CY4
14D561K	0.1uF, 305VAC	12 Ohm, 5W	1.2mH, 0.5A	20mH	300V, 1KA	2.2nF, 400VAC	1nF, 400VAC


\*R11\* is wire-w布nded resistor, FUSE\* is required, R1 ... R6 [1.5Mohm, 1206] is the bleeder resistance of CX

\*Other components see the same in Table 1



## Mechanical Specifications

### Default Package

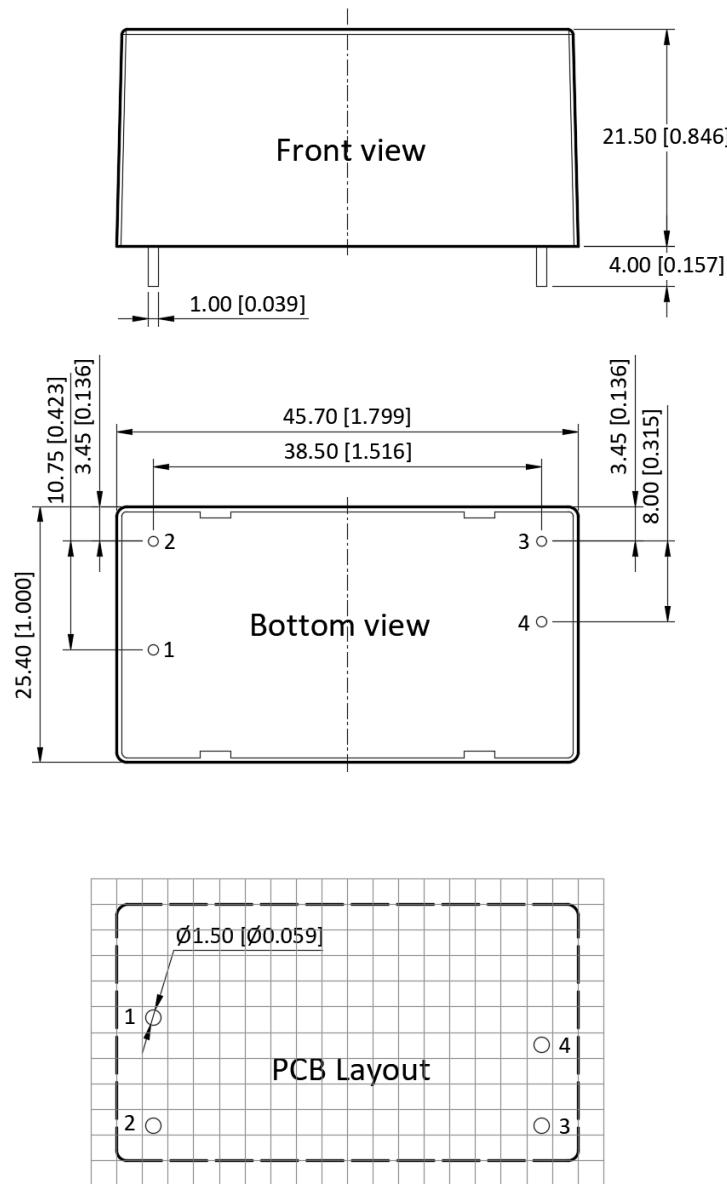

### Pin Definition

Pin #	Single Out
1	AC [L]
2	AC [N]
3	-V <sub>OUT</sub>
4	+V <sub>OUT</sub>

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 1.00$  [ $\pm 0.040$ ]

\* Pin thickness:  $\pm 0.15$  [ $\pm 0.006$ ]

\* Pin distance:  $\pm 0.50$  [ $\pm 0.020$ ]

\* Footprint grid 2.54 x 2.54 mm