



PMR15H Series

15W, Encapsulated, AC/DC Converters

WinkEE

Features

- ▶ Rated power: 15W Max
- ▶ RoHS compliance
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ No external components required for operating
- ▶ Regulated single output
- ▶ Over voltage, over current and short circuit protection
- ▶ Isolation voltage 4000VAC
- ▶ Certified to UL/EN/IEC 62368-1, OVC III, EN60335-1, EN61558-1, FCC, UKCA, CISPR32, EN55032 Class B with NO externals
- ▶ Typical efficiency 81 ... 87%
- ▶ Energy saving, standby power only 0.1W
- ▶ 5 year warranty
- ▶ Operating temperature range: -40~+85°C



RoHS **CE** **c** **UL** **US** **UK** **CA** **CB**

Overview

PMR15H series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption, high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They are certified to UL/EN/IEC 62368-1, OVC III, EN60335-1, EN61558-1, FCC, UKCA and EMC performance meets CISPR32, EN55032 Class B without support from any external components, ideally suitable for industrial, and critical commercial applications.

Model Numbers

| Model Number | Input Voltage [VAC] | Output Voltage [VDC] | Output Current [mA] Max. | Efficiency [%] Typ. | Capacitive Load [uF] Max. |
|--------------|-------------------------|----------------------|--------------------------|---------------------|---------------------------|
| PMR15H-033 | 85~305VAC 100~430VDC | 3.3 | 4000 | 81 | 8000 |
| PMR15H-050 | | 5 | 3000 | 85 | 8000 |
| PMR15H-090 | | 9 | 1670 | 85 | 5400 |
| PMR15H-120 | | 12 | 1250 | 86 | 4000 |
| PMR15H-150 | | 15 | 1000 | 87 | 3000 |
| PMR15H-240 | | 24 | 625 | 87 | 1000 |

* Only typical models are listed, other models may be available, upon request.



Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load.

| Parameters | Conditions | Min. | Typ. | Max. | Unit |
|---|---|---------------------------------|------------|-----------------------|-------------|
| Input voltage range | AC in | 85 | - | 305 | VAC |
| | DC in | 100 | - | 430 | VDC |
| Input frequency | | 47 | - | 63 | Hz |
| Nominal input voltage | | 100 | - | 277 | VAC |
| Input current | 115VAC 230VAC | - | - | 0.5 0.3 | A |
| Inrush current Cold start | 115VAC 230VAC | - | 20 45 | - | A |
| Leakage current | 277VAC, 50Hz | - | - | 0.1 | mA RMS |
| Output voltage accuracy | | - | ± 3 | - | % |
| Line regulation | Full load | - | ± 0.5 | - | % |
| Load regulation | $I_{OUT}=0\% \sim 100\% \text{ of } I_{OUT, \text{rated}}$ | - | ± 1.0 | - | % |
| Ripple and noise [2] | 20MHz bandwidth | - | 100 | 150 | mVp-p |
| Temperature coefficient | | - | ± 0.02 | - | %/°C |
| Standby power consumption | | - | 0.1 | - | W |
| Hold up time Full load | 115VAC 230VAC | - | 10 50 | - | ms |
| Over voltage protection Hiccup or clamping by zener diode | $V_{OUT}=3.3, 5V$ $V_{OUT}=9V$ $V_{OUT}=12, 15V$ $V_{OUT}=24V$ | - | - | 7.5 15 20 30 | VDC |
| Over current protection | Automatic recovery | 110 | - | - | % I_{OUT} |
| Short circuit protection | | Hiccup mode, automatic recovery | | | |
| Minimum load | | No minimum load is required | | | |
| Built in fuse | | 2A, 300V, slow blow | | | |

Note [2]: Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.



General Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Unit |
|--|----------------------|--|------|------|-------|
| Isolation voltage Tested for 1 minute | I/P to O/P | 4000 | - | - | VAC |
| Isolation resistance 500VDC, 25°C, 70%RH | I/P to O/P | 100 | - | - | M Ohm |
| Switching frequency | | - | 65 | - | KHz |
| Operating temperature range | See "Derating Curve" | -40 | - | 85 | °C |
| Storage temperature | | -40 | - | 105 | °C |
| Storage humidity | | 10 | - | 95 | %RH |
| Maximum case temperature | | - | - | 95 | °C |
| Operating altitude | See "Derating Curve" | - | - | 5000 | m |
| Soldering temperature | 5 seconds | - | 260 | - | °C |
| Case material | | Black plastic UL94-V0 | | | |
| Cooling method | | Free air convection | | | |
| Vibration | | 10Hz to 55Hz, 5G, 30 minutes along X, Y and Z axis | | | |
| MTBF | MIL-HDBK-217F | > 1,500,000 Hours, 25°C | | | |
| Overvoltage category | | OVC III | | | |
| Safety class | | Class II | | | |
| Safety approvals | | UL/EN/IEC 62368-1, UKCA, EN 60335-1, EN 61558-1 | | | |
| EMC standards | CISPR32, EN55032 | Class B with "NO External Circuit" | | | |
| ESD | IEC/EN61000-4-2 | Contact ±6kV, Air ±8kV, perf. Criteria B | | | |
| Radiated | IEC/EN61000-4-3 | 10V/m, perf. Criteria A | | | |
| EFT, Burst | IEC/EN61000-4-4 | ±2kV, perf. Criteria B ±4kV, perf. Criteria B [3] | | | |
| Surge | IEC/EN61000-4-5 | Line to Line ±1kV, perf. Criteria B Line to Line ±2kV, perf. Criteria B [3] | | | |
| Conducted | IEC/EN61000-4-6 | 10Vrms, perf. Criteria A | | | |
| Voltage dips and interruptions | IEC/EN 61000-4-11 | 0%, 70%, perf. Criteria B | | | |
| Size, and Weight | | 52.4x27.2x24mm, 55g Typ. | | | |
| Packing info | 240 PCS/Carton | Size: 372x345x260mm, G.W. 14.5Kg Typ. | | | |

Note [3]: with External Circuit Figure 1 for EMC Enhancement



Recommended External Circuits

EMC Enhancement Circuit

*This external circuit is not required for general purpose, but for EMC enhancement where higher EFT and Surge rating is needed.

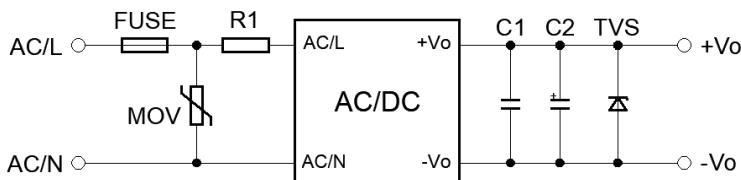


Figure 1. EMC Enhancement Circuit

Recommended Components [Table 1]

| V _{OUT} | FUSE | MOV | R1 | C1 | C2 | TVS |
|------------------|-------------|---------|-----------|----------|-----------|----------|
| 3.3, 5V | 3.15A, 300V | S14K350 | 3 Ohm, 3W | 1uF, 50V | 10uF, 35V | SMBJ7.0A |
| 9V | 3.15A, 300V | S14K350 | 3 Ohm, 3W | 1uF, 50V | 10uF, 35V | SMBJ12A |
| 12, 15V | 3.15A, 300V | S14K350 | 3 Ohm, 3W | 1uF, 50V | 10uF, 35V | SMBJ20A |
| 24V | 3.15A, 300V | S14K350 | 3 Ohm, 3W | 1uF, 50V | 10uF, 35V | SMBJ30A |


* For further questions contact one of our sales representatives.

Characteristic Curves


Derating Curves

Output vs Ambient Temperature


V_{OUT}=3.3 ... 9V

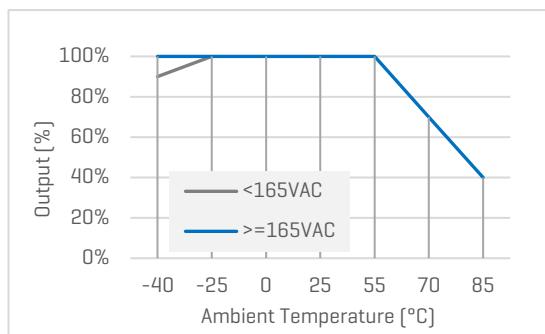


V_{OUT}=12 ... 24V

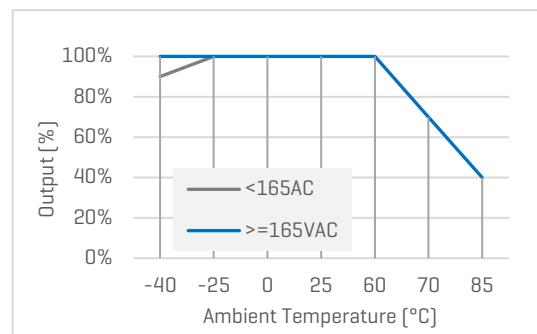

Output vs Input Voltage

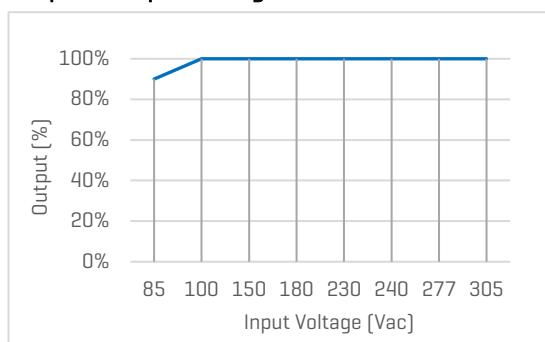



Output vs Altitude

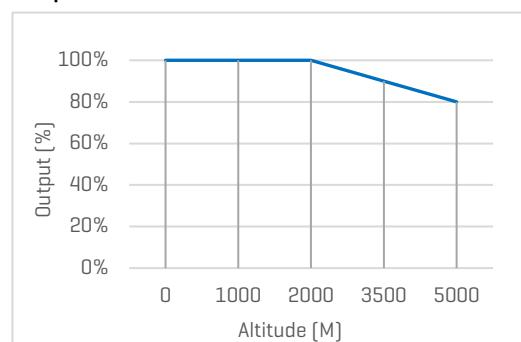



Mechanical Specifications

Default Package

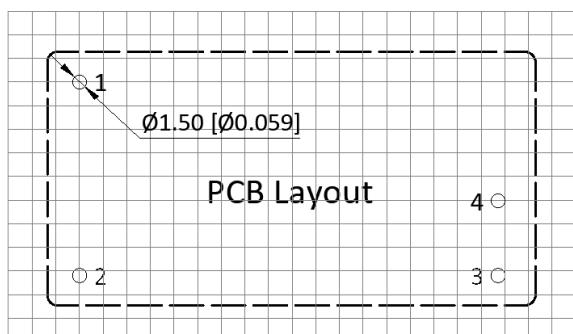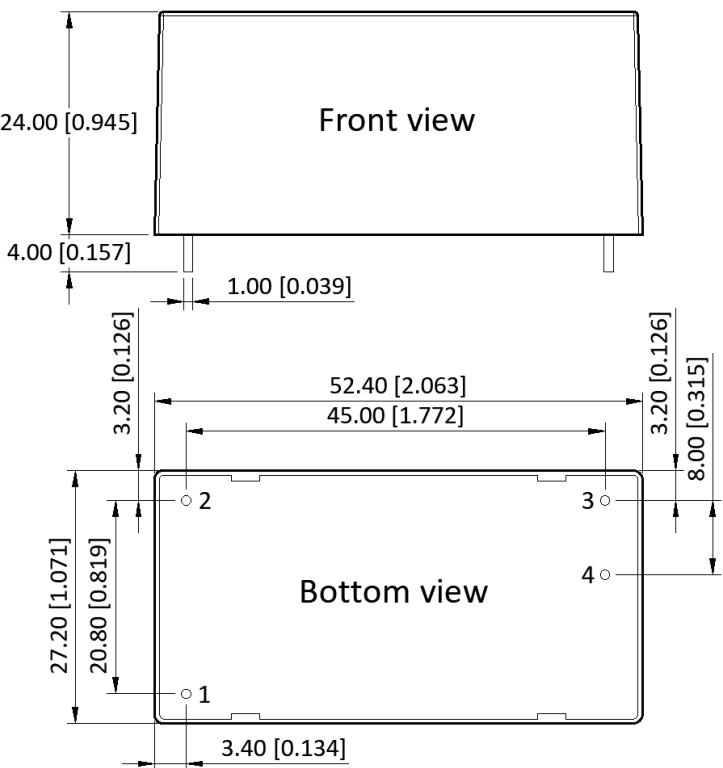

Pin Definition

| Pin # | Single Out |
|-------|-------------------|
| 1 | AC [L] |
| 2 | AC [N] |
| 3 | -V _{OUT} |
| 4 | +V _{OUT} |

* Unless otherwise specified unit: mm [inch]

* General tolerance: ± 1.00 [± 0.040]

* Pin thickness: ± 0.15 [± 0.006]

* Pin distance: ± 0.50 [± 0.020]

* Footprint grid 2.54 x 2.54 mm