

# MRK2S Series



2W, Regulated, 3KV Isolation, DC/DC Converters

## Features

- ▶ Rated power: 2W max
- ▶ Input voltage range  $\pm 5\%$
- ▶ Tightly regulated output
- ▶ High efficiency up to 73%
- ▶ Isolation voltage 3KVDC
- ▶ Operating temp. range:  $-40 \sim +85^{\circ}\text{C}$  ambient
- ▶ RoHS compliant
- ▶ Compact SIP7 package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 5 year warranty



## Overview

The MRK2S series are SIP7 package DC/DC converters with tightly regulated single output, and 3KVDC isolation. These converters feature high efficiency, low ripple and noise, short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [ $\mu\text{F}$ ] Max.
MRK2S-0503	5	3.3	400	67	2400
MRK2S-0505	[4.75~5.25]	5	400	70	2400
MRK2S-1203	12	3.3	400	69	2400
MRK2S-1205	[11.4~12.6]	5	400	72	2400
MRK2S-2403	24	3.3	400	70	2400
MRK2S-2405	[22.8~25.2]	5	400	73	2400

# MRK2S Series

2W, Regulated, 3KV Isolation, DC/DC Converters

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^\circ\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=5V$		572		mA
	$V_{IN}=12V$	-	232	-	
	$V_{IN}=24V$		115		
Input current No load	$V_{IN}=5V$		15		mA
	$V_{IN}=12V$	-	8	-	
	$V_{IN}=24V$		4		
Reflected Ripple Current		-	15	-	mA
Surge voltage 1 second max	$V_{IN}=5V$	-0.7		9	VDC
	$V_{IN}=12V$	-0.7	-	18	
	$V_{IN}=24V$	-0.7		30	
Output voltage accuracy		-	-	$\pm 3$	%
Line regulation For $V_{IN}$ change of $\pm 1\%$		-	-	$\pm 0.25$	%
Load regulation [1] $I_{OUT}=10\%$ to $100\%$ of $I_{OUT, rated}$	$V_{OUT}=3.3V$	-	-	$\pm 3$	%
	Others			$\pm 2$	
Temperature coefficient	Full load	-	$\pm 0.02$	-	%/ $^\circ\text{C}$
Output ripple and noise 20MHz bandwidth		-	50	100	mVp-p
Output short circuit protection		Continuous, automatic recovery			
Input filter		Capacitor			
Hot plug		None			

Note [1]: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.


## General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
<b>Isolation voltage</b> 1 minute, leakage current <1mA	Input to Output	3000	-	-	VDC
<b>Isolation resistance</b> Tested at 500VDC	Input to Output	1000	-	-	M ohm
<b>Isolation capacitance</b> 100KHz, 0.1V	Input to Output	-	20	-	pF
<b>Switching frequency</b>	Full load	-	250	-	KHz
<b>Temperature rise at case</b>	Full load	-	25	-	°C
<b>Operating temperature</b>	See "Derating Curve"	-40	-	+85	°C
<b>Storage temperature</b>		-55	-	+125	°C
<b>Storage humidity</b>	Non-condensing	5	-	95	%RH
<b>Pin soldering resistance</b> 1.5mm away from case for 10 sec		-	-	300	°C
<b>Case material</b>		Black plastic UL94-V0			
<b>Cooling method</b>		Free air convection			
<b>Vibration</b>		10-150Hz, 5G, 0.75mm along X, Y and Z			
<b>MTBF</b>	MIL-HDBK-217F	>3,500,000 Hours, T <sub>A</sub> =25°C			
<b>Safety standards</b>		UL/EN/IEC 62368-1			
<b>EMC standards</b>	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±4kV, Air ±8kV, perf. Criteria B			
<b>Size &amp; Weight</b>		19.65x7.05x10.16mm, 2.4g Typ.			

## Characteristic Curves

### Derating Curve

#### Output vs Ambient Temperature

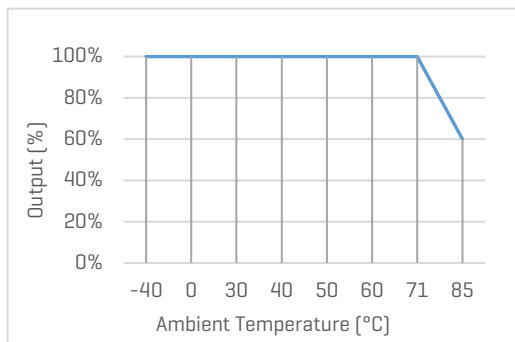

# MRK2S Series

2W, Regulated, 3KV Isolation, DC/DC Converters

## Recommended External Circuit

### Typical Application Circuit

\*Typical application circuit is to further lower the input and output ripple. It is not mandatory.



Figure 1. Typical external circuit

### [Table 1] Recommended component spec

Input voltage	5V	12V	24V
$C_{IN}$	4.7uF, 16V	2.2uF, 25V	1uF, 50V

### [Table 2] Recommended component spec

Output voltage	3.3, 5V
$C_{OUT}$	10uF, 16V

### EMC Enhancement for EN55032 Class B

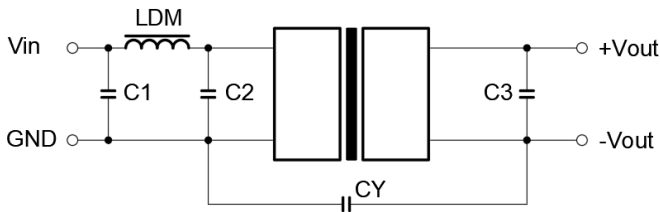


Figure 2. Circuit for EMC enhancement

### [Table 3] Recommended component spec




Component	LDM	C1, C2	CY
$V_{OUT}=3.3, 5V$	6.8uH	4.7uF, 25V	1nF, 4KV

\*C3 refer to  $C_{OUT}$  in [Table 2]

# MRK2S Series

2W, Regulated, 3KV Isolation, DC/DC Converters

## Mechanical Specifications

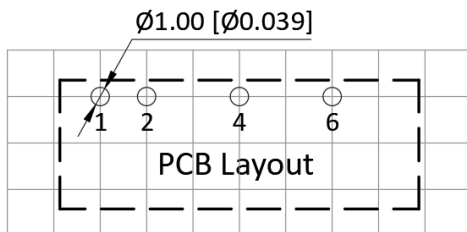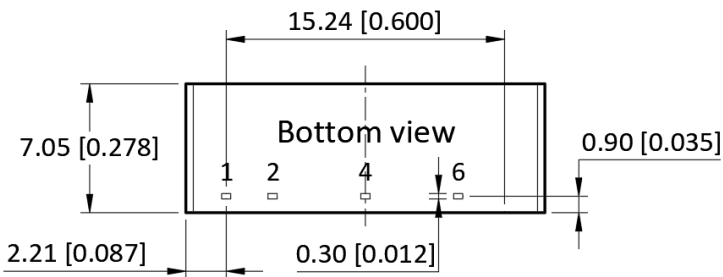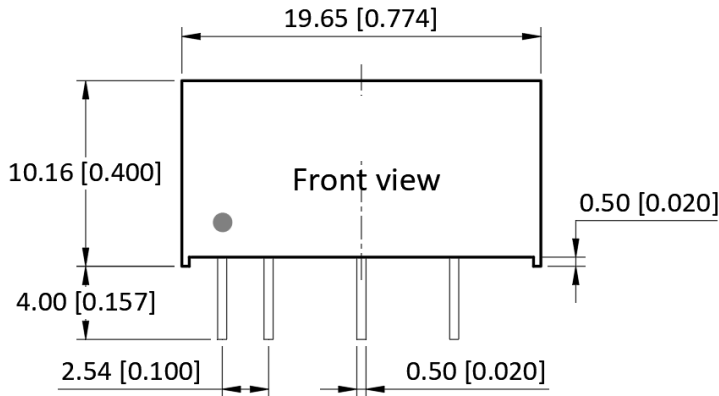

### Pin Definition

Pin #	Single Out
1	+V <sub>IN</sub>
2	-V <sub>IN</sub>
4	-V <sub>OUT</sub>
6	+V <sub>OUT</sub>

\* Unless otherwise specified unit: mm [inch]

\* General tolerance: ±0.50 [±0.020]

\* Pin thickness: ±0.10 [±0.004]

\* Footprint grid 2.54 x 2.54 mm