

# MEK2T Series

2W, Unregulated, 3KV Isolation, DC/DC Converters

## Features

- ▶ Rated power: 2W max
- ▶ Input voltage range  $\pm 10\%$
- ▶ Unregulated output
- ▶ High efficiency up to 85%
- ▶ Isolation voltage 3KVDC
- ▶ Small no load input current
- ▶ Operating temp. range: -40 ~ +105°C ambient
- ▶ RoHS compliant
- ▶ Compact SMD package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 5 year warranty



## Overview

The MEK2T series are unregulated DC/DC converters offered in compact SMD package with 3KVDC isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range -40 ~ +105°C. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [ $\mu$ F] Max.
MEK2T-0505	5 [4.5~5.5]	5	400	83	2400
MEK2T-0507		7	286	84	1000
MEK2T-0509		9	222	84	1000
MEK2T-0512		12	167	84	560
MEK2T-0515		15	133	84	560
MEK2T-0524		24	83	84	220
MEK2T-1205	12 [10.8~13.2]	5	400	83	2400
MEK2T-1209		9	222	84	1200
MEK2T-1212		12	167	84	560
MEK2T-1215		15	133	84	560
MEK2T-1224		24	83	84	220
MEK2T-1505	15 [13.5~16.5]	5	400	83	2400
MEK2T-1509		9	222	84	1200
MEK2T-1512		12	167	84	560
MEK2T-1515		15	133	84	560
MEK2T-1524		24	83	84	220

### Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [ $\mu$ F] Max.
MEK2T-2405	24 [21.6~26.4]	5	400	83	2400
MEK2T-2409		9	222	83	1200
MEK2T-2412		12	167	84	560
MEK2T-2415		15	133	85	560
MEK2T-2424		24	83	85	220

### Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^\circ\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-	477 196 161 98	-	mA
Input current No load		-	8	-	mA
Reflected Ripple Current		-	30	-	mA
Surge voltage 1 second max	$V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-0.7 -0.7 -0.7 -0.7	-	9 18 21 30	VDC
Output voltage accuracy	All models	Refer to graphic in "Characteristic Curves" section			
Line regulation For $V_{IN}$ change of $\pm 1\%$		-	-	$\pm 1.2$	%
Load regulation <sup>[1]</sup> $I_{OUT}=10\%$ to $100\%$ of $I_{OUT, \text{rated}}$	$V_{OUT}=5\text{V}$ $V_{OUT}=7\text{V}$ $V_{OUT}=9\text{V}$ $V_{OUT}=12\text{V}$ $V_{OUT}=15\text{V}$ $V_{OUT}=24\text{V}$	-	10 8 8 7 6 6	15 12 10 10 10 10	%
Temperature coefficient	Full load	-	$\pm 0.02$	-	$\%/^\circ\text{C}$
Output ripple and noise	20MHz bandwidth	-	50	150	mVp-p
Output short circuit protection		Continuous, automatic recovery			
Input filter		Capacitor			
Hot plug		None			

Note <sup>[1]</sup>: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

### General Specifications


Parameters	Conditions	Min.	Typ.	Max.	Unit
<b>Isolation voltage</b> 1 minute, leakage current <1mA	Input to Output	3000	-	-	VDC
<b>Isolation resistance</b> Tested at 500VDC	Input to Output	1000	-	-	M ohm
<b>Isolation capacitance</b> 100KHz, 0.1V	Input to Output	-	20	-	pF
<b>Switching frequency</b>	Full load	-	260	-	KHz
<b>Operating temperature</b>	See "Derating Curve"	-40	-	+105	°C
<b>Storage temperature</b>		-55	-	+125	°C
<b>Temperature rise at case</b>	Full load	-	25	-	°C
<b>Storage humidity</b>	Non-condensing	5	-	95	%RH
<b>Reflow soldering temperature</b>		Peak temp. 217 - 245°C, maximum duration 60s			
<b>Case material</b>		Black plastic UL94-V0			
<b>Cooling method</b>		Free air convection			
<b>Vibration</b>		10-150Hz, 5G, 0.75mm along X, Y and Z			
<b>Moisture sensitivity level [MSL]</b>		IPC/JEDEC J-STD-020D.1 Level 1			
<b>MTBF</b>	MIL-HDBK-217F	>3,500,000 Hours, T <sub>A</sub> =25°C			
<b>Safety standards</b>		UL/EN/IEC 62368-1			
<b>EMC standards</b>	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±4kV, Air ±8kV, perf. Criteria B			
<b>Size &amp; Weight</b>		13.5x11x7.25mm, 1.2g Typ.			

# MEK2T Series


2W, Unregulated, 3KV Isolation, DC/DC Converters

## Characteristic Curves

Output vs Ambient Temperature

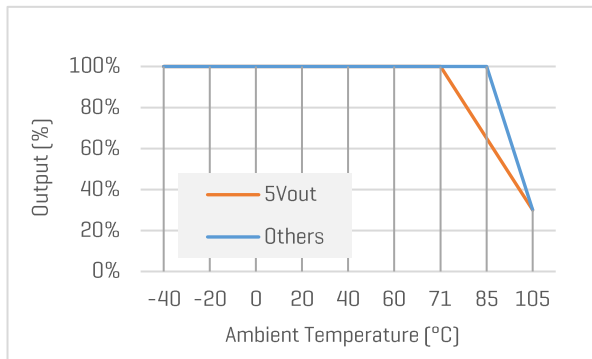


Output Voltage Accuracy vs Load

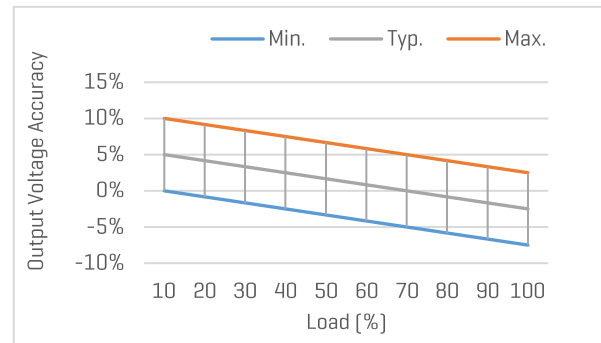


Efficiency vs Input Voltage

MEK2T-0505, with full Load

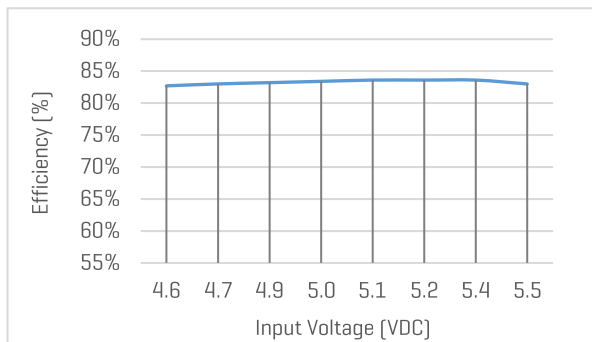


Efficiency vs Load

MEK2T-0505, with nominal input voltage

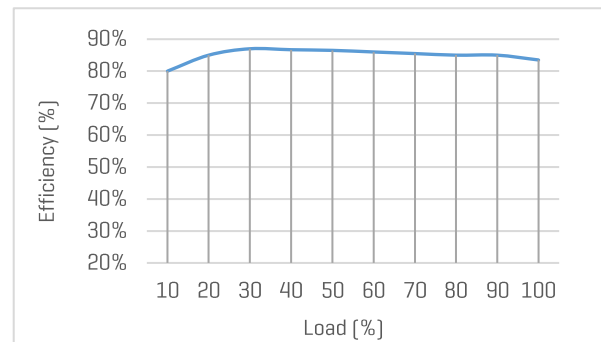


Efficiency vs Input Voltage

MEK2T-1205, with full Load

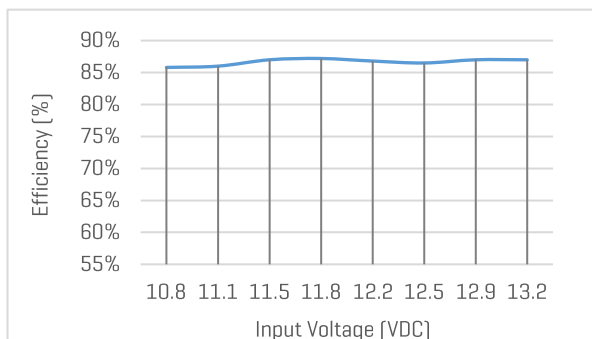

Efficiency vs Load

MEK2T-1205, with nominal input voltage

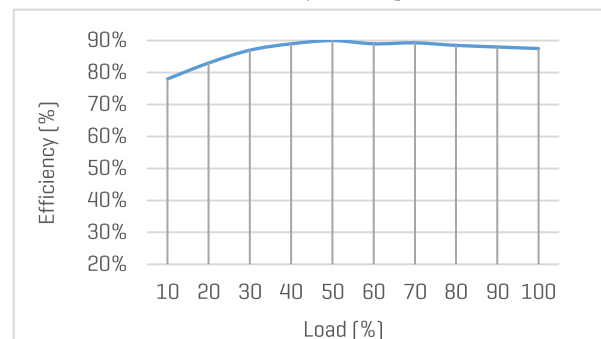

# MEK2T Series

2W, Unregulated, 3KV Isolation, DC/DC Converters

## Recommended External Circuit

### Typical Application Circuit

\*Typical application circuit is to further lower the input and output ripple. It is not mandatory.



Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	5V	12V	15V	24V
$C_{IN}$	4.7 $\mu$ F, 16V	2.2 $\mu$ F, 25V	1 $\mu$ F, 25V	1 $\mu$ F, 50V

[Table 2] Recommended component spec

Output voltage	5V	9V	12V	15V	24V
$C_{OUT}$	10 $\mu$ F, 16V	2.2 $\mu$ F, 25V	2.2 $\mu$ F, 25V	1 $\mu$ F, 25V	0.47 $\mu$ F, 50V

### EMC Enhancement for EN55032 Class B

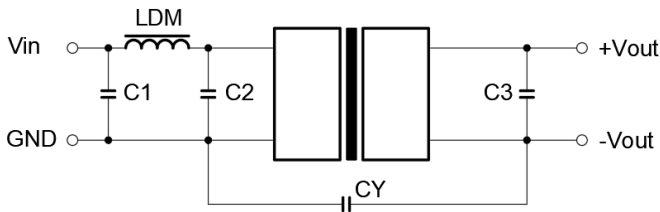





Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec

Component	LDM	C1, C2	CY
$C_{OUT}$	6.8 $\mu$ H	4.7 $\mu$ F, 50V	270pF, 4KV

\*"C3" refer to  $C_{OUT}$  in [Table 2]

## Mechanical Specifications

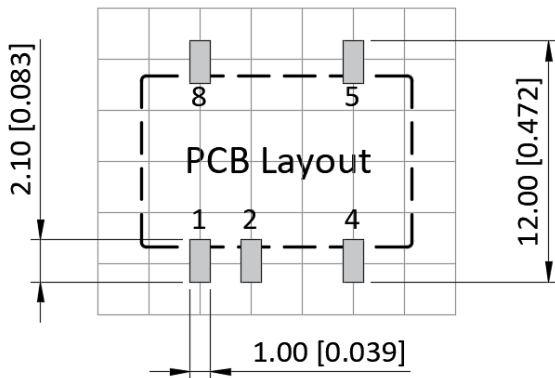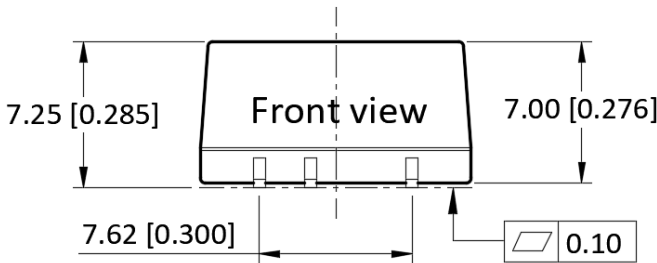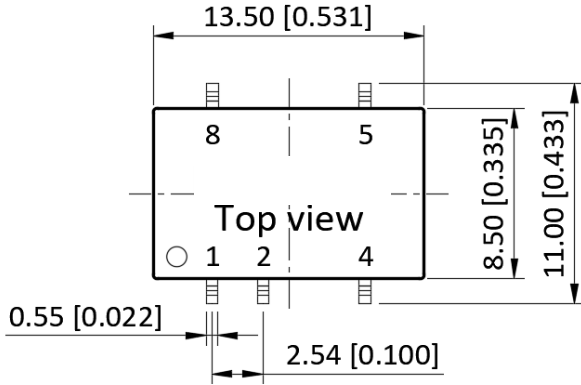

### Pin Definition

Pin #	Single Out
1	-V <sub>IN</sub>
2	+V <sub>IN</sub>
4	-V <sub>OUT</sub>
5	+V <sub>OUT</sub>
8	N/C

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 0.25$  [ $\pm 0.010$ ]

\* Pin thickness:  $\pm 0.10$  [ $\pm 0.004$ ]

\* Footprint grid 2.54 x 2.54 mm