



# MA10H Series

**WinkEE**

10W, Encapsulated DIP2"X1" Package DC/DC Converters for Railway Applications

## Features

- ▶ Rated power: 10W Max
- ▶ Input voltage 40...160VDC
- ▶ Regulated output
- ▶ High efficiency up to 85%
- ▶ Isolation voltage 2250VDC
- ▶ Low ripple and noise
- ▶ Operating temperature range: -40 ~ +85°C ambient
- ▶ RoHS compliant
- ▶ Standard 2"x1" package
- ▶ Under voltage, over voltage, over current, and short circuit protection
- ▶ Meet IEC/EN 62368-1, EN50155 standards
- ▶ Designed for railway apps
- ▶ 5 year warranty



## Model Numbers

Model Number	Input Voltage [VDC]			V <sub>out</sub> [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
<b>MA10H-033</b>	110	40-160	170	3.3	2400	0	76	5400
<b>MA10H-050</b>	110	40-160	170	5	2000	0	80	5400
<b>MA10H-120</b>	110	40-160	170	12	833	0	84	470
<b>MA10H-150</b>	110	40-160	170	15	667	0	84	330
<b>MA10H-240</b>	110	40-160	170	24	417	0	85	100

\* Input voltage exceed the Max. value may cause permanent damage.

\* Only typical models are listed. Other models may be available upon request.



## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^\circ\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
<b>Input current</b> Full load	$V_{\text{OUT}}=3.3\text{V}$	-	95 110	-	mA	
<b>Input current</b> No load			3	8	mA	
<b>Reflected ripple current</b>		-	25	-	mA	
<b>Input voltage surge</b> 1 second max		-0.7	-	180	VDC	
<b>Startup input voltage</b>	Full load	-	-	40	VDC	
<b>Startup time</b>	Resistive load	-	10	-	μs	
<b>Input under voltage shutdown</b>		28	33	-	VDC	
<b>Output voltage accuracy</b>	$I_{\text{OUT}}=5\% \text{ to } 100\%$	-	$\pm 1$	$\pm 3$	%	
<b>Line regulation</b> Full load, $V_{\text{IN}}=V_{\text{IN, Min}} \text{ to } V_{\text{IN, Max}}$		-	$\pm 0.4$	$\pm 1.0$	%	
<b>Load regulation</b> $I_{\text{OUT}}=5\% \text{ to } 100\% \text{ of } I_{\text{OUT, rated}}$		-	$\pm 0.5$	$\pm 1.0$	%	
<b>Output ripple and noise</b>	20MHz bandwidth	-	50	100	mVp-p	
<b>Temperature coefficient</b>	Full load	-	-	0.03	%/ $^\circ\text{C}$	
<b>Dynamic load response</b> $I_{\text{OUT}}=25\% \text{ to } 50\% \text{ to } 75\% \text{ of } I_{\text{OUT, rated}}$	Peak deviation* Peak deviation Recovery time	-	$\pm 3$ $\pm 3$ 300	$\pm 8$ $\pm 5$ 500	% $V_{\text{OUT}}$ % $V_{\text{OUT}}$ μs	* $V_{\text{OUT}}=3.3, 5\text{V}$
<b>Output over voltage protection</b>		110	-	160	% $V_{\text{OUT}}$	
<b>Output over current protection</b>		120	-	210	% $I_{\text{OUT}}$	
<b>Output short circuit protection</b>		Continuous, automatic recovery				
<b>Input filter</b>		PI filter				
<b>Hot plug</b>		None				

\* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.



## General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
<b>Isolation voltage</b> 1 minute, leakage current 1mA max.	I/P to O/P I/P & O/P to Case	2250 1600	-	-	VDC	
<b>Isolation resistance</b> Tested at 500VDC	I/P to O/P	1000	-	-	M ohm	
<b>Isolation capacitance</b> 100KHz, 0.1V	I/P to O/P	-	2200	-	pF	
<b>Switching frequency*</b>	Full load	-	300	-	KHz	PWM mode
<b>Operating temperature</b>	See "Derating Curve"	-40	-	85	°C	
<b>Storage temperature</b>		-55	-	125	°C	
<b>Storage humidity</b>	None condensing	5	-	95	%RH	
<b>Pin soldering resistance</b> 1.5mm away from case for 10 sec		-	-	300	°C	
<b>Cooling method</b>		Free air convection				
<b>Case material</b>		Aluminum alloy				
<b>Vibration</b>		IEC/EN61373 – Category 1, Grade B				
<b>MTBF</b>	MIL-HDBK-217F	>1,000,000 Hours, T <sub>A</sub> =25°C				
<b>Design based on standards</b>		IEC/EN 62368-1, EN50155				
<b>Safety certifications</b>		IEC/EN 62368-1				
<b>EMC</b>		CISPR32, EN55032 Class B, IEC/EN61000-4-2, 3, 4, 5, 6 EN50155, IEC/EN50121-3-2, EN55016-2-1				
<b>Size, and Weight</b>		50.8 x 25.4 x 12 mm, 41g				

\* Switching frequency is measured at full load. The converter reduces the switching frequency at low load [less than 50% load] for better efficiency.




## Characteristic Curves

### Derating Curve


#### Output vs Ambient Temperature

No heatsink

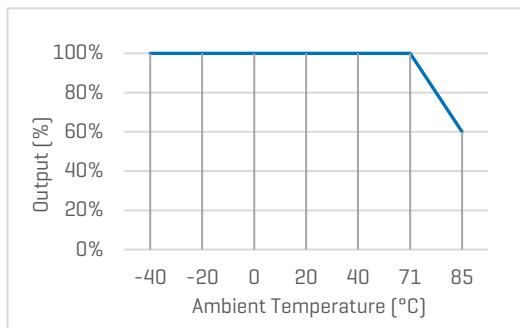

#### Output vs Input Voltage


With heatsink

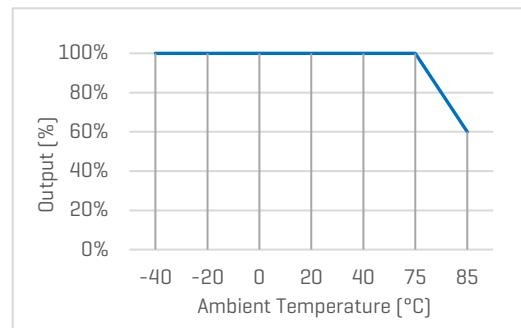

### Efficiency Curve


#### Efficiency vs Input Voltage

Full load

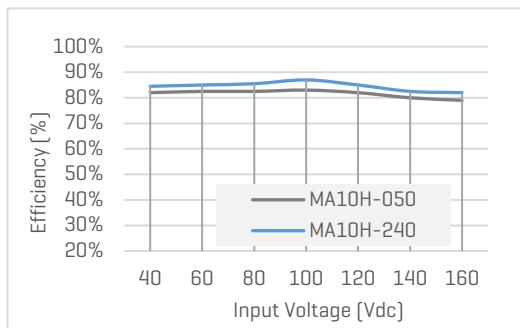


#### Efficiency vs Load

$V_{IN}=110Vdc$

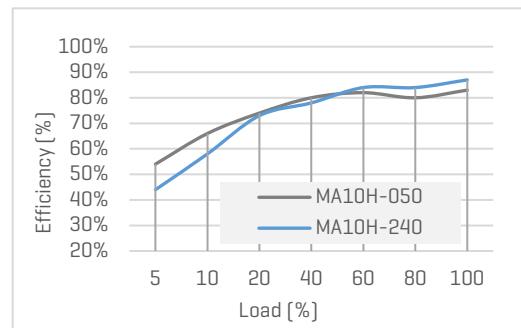

## Recommended Application Circuit

### Typical External Circuit

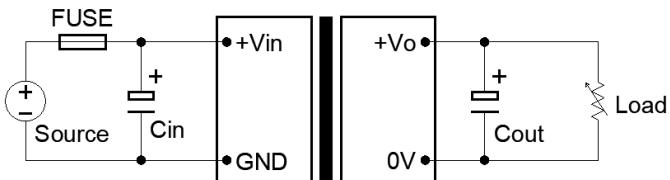

#### Note

\*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

\*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

Figure 1. Typical external circuit

[Table 1] Recommended component spec

V <sub>OUT</sub>	3.3, 5V	12, 15V	24V
C <sub>OUT</sub>	100uF	47uF	22uF

\*Recommended FUSE to be 2A slow blow, and C<sub>IN</sub> to be 10...47uF

### Circuit for EMC Enhancement

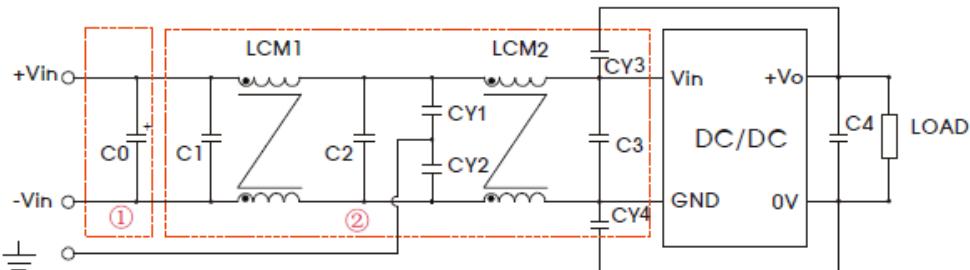


Figure 2: Circuit for EMC Enhancement

[Table 2] Recommended component specifications



Symbol	Condition	Recommended value
<b>Fuse</b>		2A, slow blow
<b>LCM1</b>		2.2mH
<b>LCM2</b>		1.1mH
<b>C0</b>		100uF, 200V
<b>C1, C2</b>		0.22uF, 250V
<b>C3</b>		10~47uF
<b>C4</b>		Refer to C <sub>OUT</sub> in Table 1
<b>CY1 ... CY4</b>		1000pF, 400VAC

\* Do not use two converters in parallel to supply higher power.

\* Consult our technical staff for more information about application.



## Mechanical Specifications

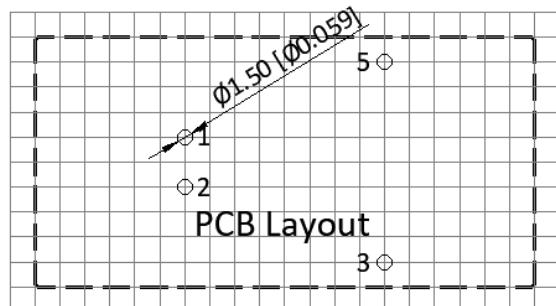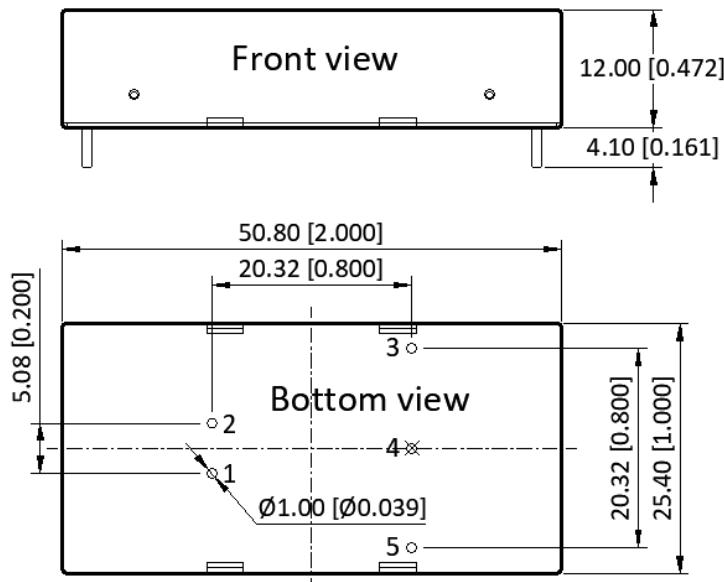

### Pin Definition

Pin #	Single Out
1	GND
2	V <sub>IN</sub>
3	+V <sub>OUT</sub>
4	No Pin
5	OV

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

\* Pin thickness:  $\pm 0.10$  [ $\pm 0.004$ ]

\* Footprint grid 2.54 x 2.54 mm