

MR2S Series

2W, Regulated, 1.5KV Isolation, DC/DC Converters

Features

- ▶ Rated power: 2W max
- ▶ Input voltage range $\pm 5\%$
- ▶ Tightly regulated output
- ▶ High efficiency up to 73%
- ▶ Isolation voltage 1.5KVDC
- ▶ Operating temp. range: $-40 \sim +85^{\circ}\text{C}$ ambient
- ▶ RoHS compliant
- ▶ Compact SIP7 package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 5 year warranty



Overview

The MR2S series are SIP7 package DC/DC converters with tightly regulated single output, and 1.5KVDC isolation. These converters feature high efficiency, low ripple and noise, short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [μF] Max.
MR2S-0503	5	3.3	400	67	2400
MR2S-0505	[4.75~5.25]	5	400	70	2400
MR2S-1203	12	3.3	400	69	2400
MR2S-1205	[11.4~12.6]	5	400	72	2400
MR2S-2403	24	3.3	400	70	2400
MR2S-2405	[22.8~25.2]	5	400	73	2400

MR2S Series

2W, Regulated, 1.5KV Isolation, DC/DC Converters

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=5\text{V}$		572		mA
	$V_{IN}=12\text{V}$	-	232	-	
	$V_{IN}=24\text{V}$		115		
Input current No load	$V_{IN}=5\text{V}$		15		mA
	$V_{IN}=12\text{V}$	-	8	-	
	$V_{IN}=24\text{V}$		4		
Reflected Ripple Current		-	15	-	mA
Surge voltage 1 second max	$V_{IN}=5\text{V}$	-0.7		9	VDC
	$V_{IN}=12\text{V}$	-0.7	-	18	
	$V_{IN}=24\text{V}$	-0.7		30	
Output voltage accuracy		-	-	± 3	%
Line regulation For V_{IN} change of $\pm 1\%$		-	-	± 0.25	%
Load regulation [1] $I_{OUT}=10\%$ to 100% of $I_{OUT, rated}$	$V_{OUT}=3.3\text{V}$	-	-	± 3	%
	Others			± 2	
Temperature coefficient	Full load	-	± 0.02	-	$\%/^{\circ}\text{C}$
Output ripple and noise 20MHz bandwidth		-	50	100	mVp-p
Output short circuit protection		Continuous, automatic recovery			
Input filter		Capacitor			
Hot plug		None			

Note [1]: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

MR2S Series

2W, Regulated, 1.5KV Isolation, DC/DC Converters


General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage 1 minute, leakage current <1mA	Input to Output	1500	-	-	VDC
Isolation resistance Tested at 500VDC	Input to Output	1000	-	-	M ohm
Isolation capacitance 100KHz, 0.1V	Input to Output	-	20	-	pF
Switching frequency	Full load	-	250	-	KHz
Temperature rise at case	Full load	-	25	-	°C
Operating temperature	See "Derating Curve"	-40	-	+85	°C
Storage temperature		-55	-	+125	°C
Storage humidity	Non-condensing	5	-	95	%RH
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z			
MTBF	MIL-HDBK-217F	>3,500,000 Hours, T _A =25°C			
Safety standards		UL/EN/IEC 62368-1			
EMC standards	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±4kV, Air ±8kV, perf. Criteria B			
Size & Weight		19.65x7.05x10.16mm, 2.4g Typ.			

Characteristic Curves

Derating Curve

Output vs Ambient Temperature

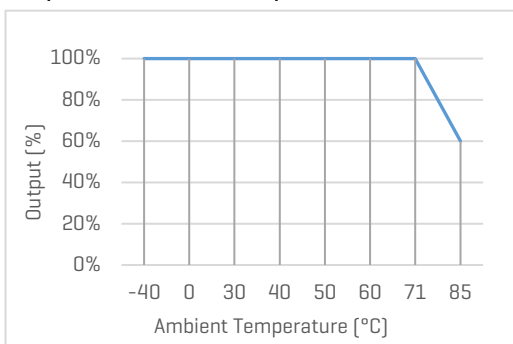

MR2S Series

2W, Regulated, 1.5KV Isolation, DC/DC Converters

Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not mandatory.



Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	5V	12V	24V
C_{IN}	4.7uF, 16V	2.2uF, 25V	1uF, 50V

[Table 2] Recommended component spec

Output voltage	3.3, 5V
C_{OUT}	10uF, 16V

EMC Enhancement for EN55032 Class B

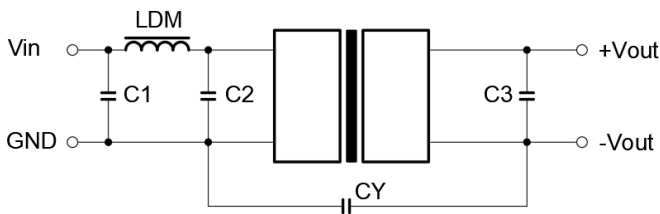


Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec




Component	LDM	C1, C2	CY
$V_{OUT}=3.3, 5V$	6.8uH	4.7uF, 25V	1nF, 2KV

*C3 refer to C_{OUT} in [Table 2]

MR2S Series

2W, Regulated, 1.5KV Isolation, DC/DC Converters

Mechanical Specifications

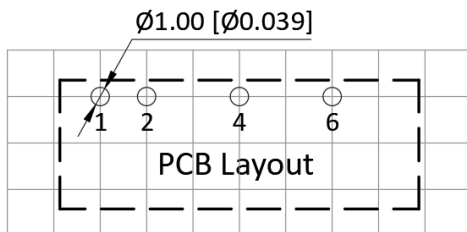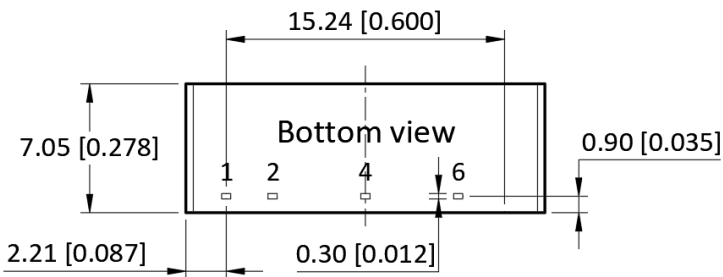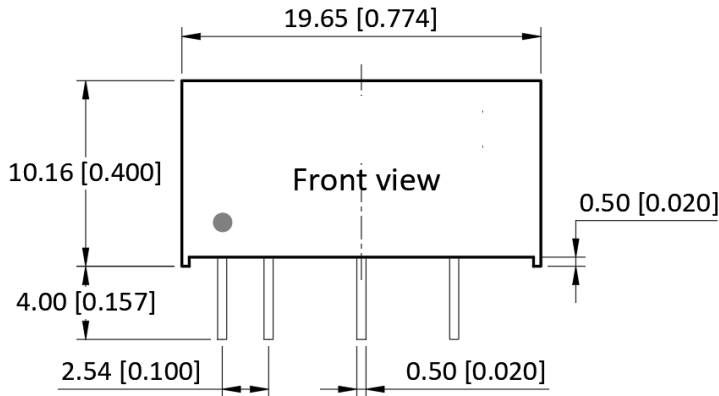

Pin Definition

Pin #	Single Out
1	+V _{IN}
2	-V _{IN}
4	-V _{OUT}
6	+V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ±0.50 [±0.020]

* Pin thickness: ±0.10 [±0.004]

* Footprint grid 2.54 x 2.54 mm