


ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

Features

- ▶ Rated power: 1W max
- ▶ Input voltage range $\pm 10\%$
- ▶ Unregulated output
- ▶ High efficiency up to 89%
- ▶ Isolation voltage 1.5KVDC
- ▶ Small no load input current
- ▶ Operating temp. range: -40 ~ +105°C ambient
- ▶ RoHS compliant
- ▶ Compact SIP7 package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 5 year warranty



Overview

The ME1S series are unregulated SIP7 package DC/DC converters with single or dual outputs, and 1.5KVdc isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [μ F] Max.
ME1S-0303	3.3 [2.97~3.63]	3.3	303	82	4000
ME1S-0305		5	200	83	4000
ME1S-0309		9	111	84	2000
ME1S-0312		12	84	85	1000
ME1S-0315		15	67	85	680
ME1S-0324		24	42	84	560
ME1S-0503 ^[1]	5 [4.5~5.5]	3.3	303	83	4000
ME1S-0505 ^[1]		5	200	86	4000
ME1S-0509 ^[1]		9	111	86	2000
ME1S-0512 ^[1]		12	84	88	1000
ME1S-0515 ^[1]		15	67	88	680
ME1S-0524 ^[1]		24	42	89	560
ME1S-0503D ^[1]	5 [4.5~5.5]	± 3.3	± 152	76	± 2000
ME1S-0505D ^[1]		± 5	± 100	86	± 2000
ME1S-0509D ^[1]		± 9	± 56	86	± 1000
ME1S-0512D ^[1]		± 12	± 42	88	± 560
ME1S-0515D ^[1]		± 15	± 34	88	± 220
ME1S-0524D		± 24	± 21	88	± 100

ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
ME1S-1203	12 [10.8~13.2]	3.3	303	84	4000
ME1S-1205		5	200	86	4000
ME1S-1209		9	111	87	2000
ME1S-1212		12	84	87	1000
ME1S-1215		15	67	88	680
ME1S-1224		24	42	89	560
ME1S-1203D	12 [10.8~13.2]	±3.3	±152	84	±2000
ME1S-1205D		±5	±100	86	±2000
ME1S-1209D		±9	±56	87	±1000
ME1S-1212D		±12	±42	87	±560
ME1S-1215D		±15	±34	88	±220
ME1S-1224D		±24	±21	84	±100
ME1S-1505	15 [13.5~16.5]	5	200	86	4000
ME1S-1509		9	111	87	2000
ME1S-1512		12	84	87	1000
ME1S-1515		15	67	88	680
ME1S-1524		24	42	84	560
ME1S-1505D	15 [13.5~16.5]	±5	±100	86	±2000
ME1S-1512D		±12	±42	87	±560
ME1S-1515D		±15	±34	88	±220
ME1S-1524D		±24	±21	84	±100
ME1S-2403	24 [21.6~26.4]	3.3	303	84	4000
ME1S-2405		5	200	87	4000
ME1S-2409		9	111	88	2000
ME1S-2412		12	84	88	1000
ME1S-2415		15	67	88	680
ME1S-2424		24	42	89	560
ME1S-2405D	24 [21.6~26.4]	±5	±100	87	±2000
ME1S-2409D		±9	±56	88	±1000
ME1S-2412D		±12	±42	88	±560
ME1S-2415D		±15	±34	88	±220
ME1S-2424D		±24	±21	84	±100

Note [1]: Models that are certified to UL62368-1.

ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=3.3\text{V}$	-	370	390	mA
	$V_{IN}=5\text{V}$		230	260	
	$V_{IN}=12\text{V}$		99	105	
	$V_{IN}=15\text{V}$		78	85	
	$V_{IN}=24\text{V}$		50	55	
Input current No load		-	3	15	mA
Reflected Ripple Current		-	15	-	mA
Surge voltage 1 second max	$V_{IN}=3.3\text{V}$	-0.7	-	5	VDC
	$V_{IN}=5\text{V}$	-0.7		9	
	$V_{IN}=12\text{V}$	-0.7		18	
	$V_{IN}=15\text{V}$	-0.7		21	
	$V_{IN}=24\text{V}$	-0.7		30	
Output voltage accuracy	All models	Refer to graphic in "Characteristic Curves" section			
Line regulation For V_{IN} change of $\pm 1\%$	$V_{OUT}=3.3\text{V}$	-	-	± 1.5	%
	All others			± 1.2	
Load regulation [2] $I_{OUT}=10\%$ to 100% of $I_{OUT, rated}$	$V_{OUT}=3.3\text{V}$	-	10	20	%
	Others		8	15	
Temperature coefficient	Full load	-	± 0.03	-	$\%/^{\circ}\text{C}$
Output ripple and noise	20MHz bandwidth	-	45	100	mVp-p
Output short circuit protection		Continuous, automatic recovery			
Input filter		Capacitor			
Hot plug		None			

Note [2]: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured. Dual output models need to operate with balanced load. The load difference between two outputs over 10% may cause unstable operating of the converter.

ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage 1 minute, leakage current <1mA	Input to Output	1500	-	-	VDC
Isolation resistance Tested at 500VDC	Input to Output	1000	-	-	M ohm
Isolation capacitance 100KHz, 0.1V	Input to Output	-	20	-	pF
Switching frequency	Full load	-	220	-	KHz
Temperature rise at case	Full load	-	15	-	°C
Operating temperature	See "Derating Curve"	-40	-	+105	°C
Storage temperature		-55	-	+125	°C
Storage humidity	Non-condensing	5	-	95	%RH
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z			
MTBF	MIL-HDBK-217F	>3,500,000 Hours, T _A =25°C			
Safety standards		UL/EN/IEC 62368-1			
EMC standards	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±4kV, Air ±8kV, perf. Criteria B			
Size & Weight		19.65x6x10.16mm, 2.1g Typ.			


ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters


Characteristic Curves

Output vs Ambient Temperature

All models

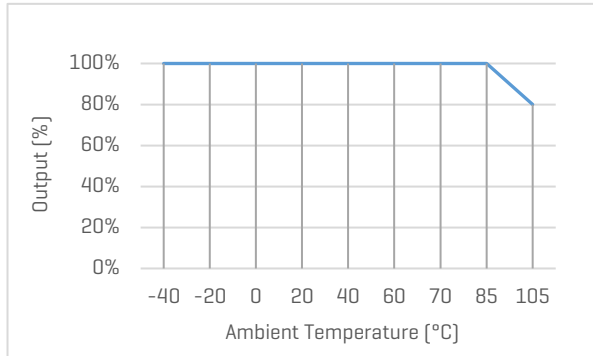


Output Voltage Accuracy vs Load

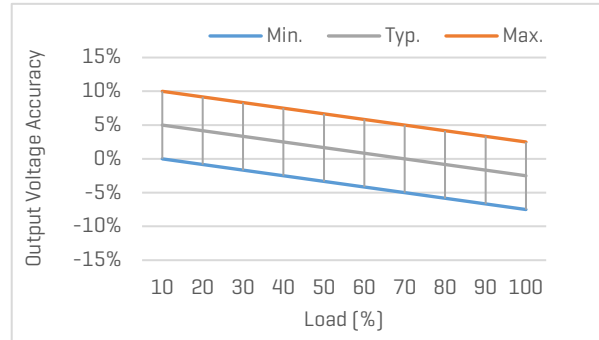


Efficiency vs Input Voltage

ME1S-1205, with full Load

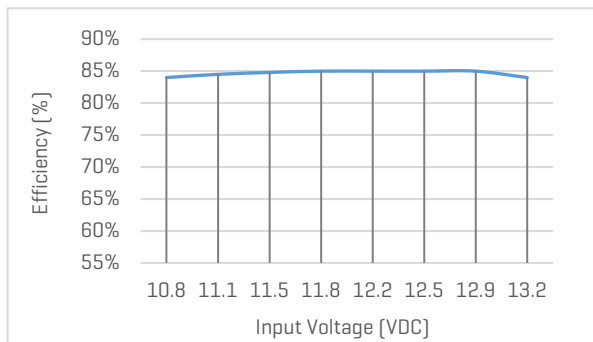


Efficiency vs Load

ME1S-1205, with nominal input voltage

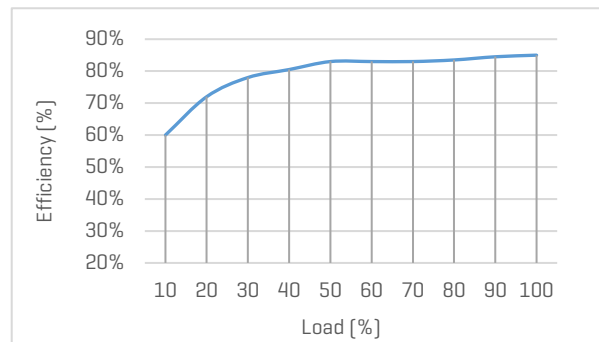


Efficiency vs Input Voltage

ME1S-0505D, with full Load

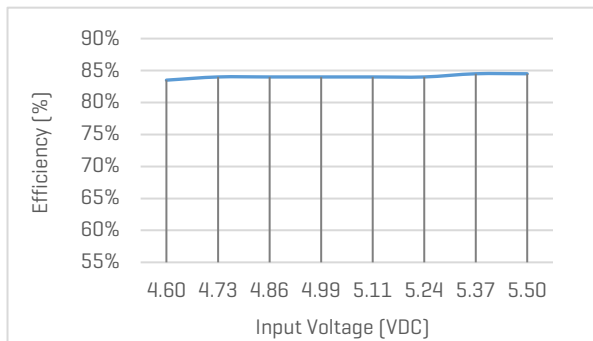

Efficiency vs Load

ME1S-0505D, with nominal input voltage

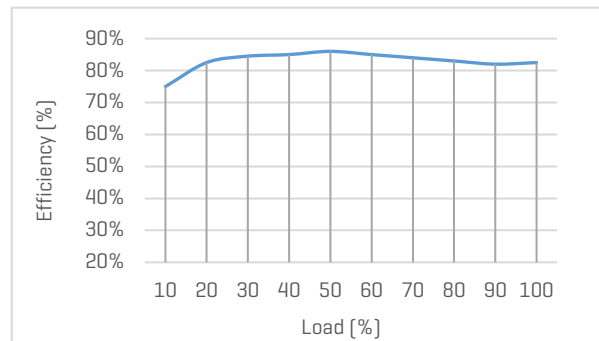

ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not mandatory.

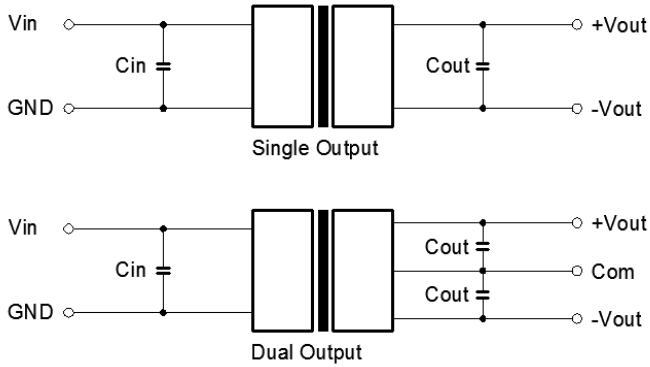


Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	3.3, 5V	12V	15V	24V
C_{IN}	4.7 μ F, 16V	2.2 μ F, 25V	2.2 μ F, 25V	1 μ F, 50V

[Table 2] Recommended component spec

Output voltage	3.3, 5V	9V	12V	15V	24V
C_{OUT}	10 μ F, 16V	4.7 μ F, 16V	2.2 μ F, 25V	1 μ F, 25V	0.47 μ F, 50V

EMC Enhancement for EN55032 Class B

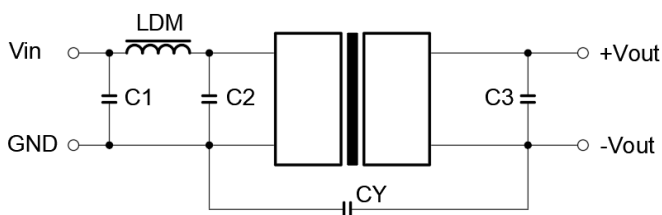


Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec





Component	LDM	C1, C2	CY
C_{OUT}	6.8 μ H	4.7 μ F, 50V	1nF, 2KV

*"C3" refer to C_{OUT} in [Table 2]

ME1S Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

Mechanical Specifications

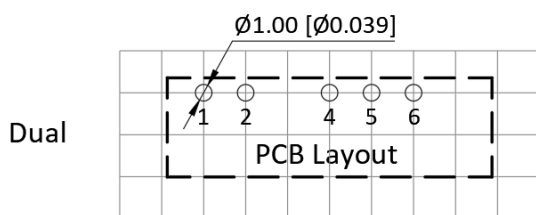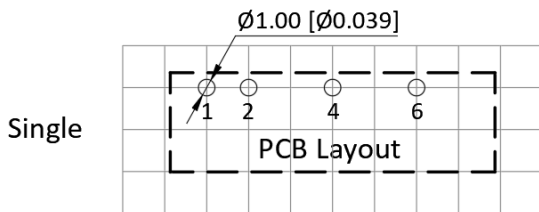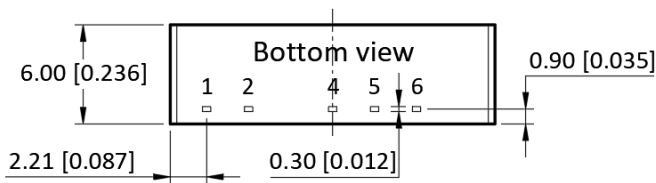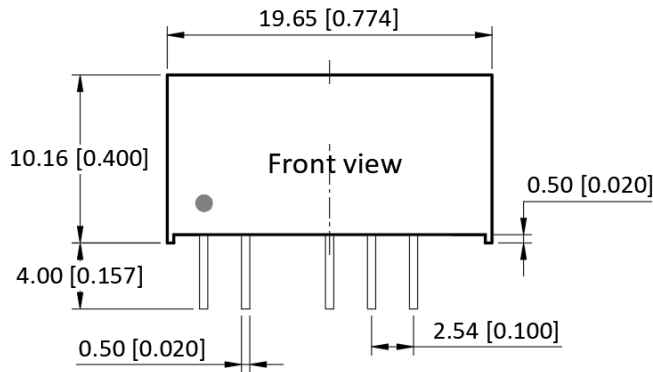

Pin Definition

Pin #	Single Out	Dual Out
1	+V _{IN}	+V _{IN}
2	-V _{IN}	-V _{IN}
4	-V _{OUT}	-V _{OUT}
5	No Pin	COM
6	+V _{OUT}	+V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ±0.50 [±0.020]

* Pin thickness: ±0.10 [±0.004]

* Footprint grid 2.54 x 2.54 mm