

# ME1T-D Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Features

- ▶ Rated power: 1W max
- ▶ Input voltage range  $\pm 10\%$
- ▶ Unregulated output
- ▶ High efficiency up to 85%
- ▶ Isolation voltage 1.5KVDC
- ▶ Small no load input current
- ▶ Operating temp. range: -40 ~ +105°C ambient
- ▶ RoHS compliant
- ▶ Compact SMD package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 5 year warranty



## Overview

The ME1T-D series are unregulated DC/DC converters offered in compact SMD package with 1.5KVDC isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range -40 ~ +105°C. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [ $\mu$ F] Max.
ME1T-0303D	3.3 [2.97~3.63]	$\pm 3.3$	$\pm 152$	77	$\pm 1200$
ME1T-0305D		$\pm 5$	$\pm 100$	82	$\pm 1200$
ME1T-0309D		$\pm 9$	$\pm 56$	82	$\pm 470$
ME1T-0312D		$\pm 12$	$\pm 42$	82	$\pm 220$
ME1T-0315D		$\pm 15$	$\pm 34$	82	$\pm 220$
ME1T-0324D		$\pm 24$	$\pm 21$	84	$\pm 100$
ME1T-0503D	5 [4.5~5.5]	$\pm 3.3$	$\pm 152$	74	$\pm 1200$
ME1T-0505D		$\pm 5$	$\pm 100$	82	$\pm 1200$
ME1T-0509D		$\pm 9$	$\pm 56$	83	$\pm 470$
ME1T-0512D		$\pm 12$	$\pm 42$	83	$\pm 220$
ME1T-0515D		$\pm 15$	$\pm 34$	83	$\pm 220$
ME1T-0524D		$\pm 24$	$\pm 21$	85	$\pm 100$
ME1T-1203D	12 [10.8~13.2]	$\pm 3.3$	$\pm 152$	77	$\pm 1200$
ME1T-1205D		$\pm 5$	$\pm 100$	82	$\pm 1200$
ME1T-1207D		$\pm 7.5$	$\pm 67$	82	$\pm 470$
ME1T-1209D		$\pm 9$	$\pm 56$	83	$\pm 470$
ME1T-1212D		$\pm 12$	$\pm 42$	83	$\pm 220$
ME1T-1215D		$\pm 15$	$\pm 34$	83	$\pm 220$
ME1T-1224D		$\pm 24$	$\pm 21$	85	$\pm 100$

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
ME1T-1515D	15 [13.5~16.5]	±15	±34	83	±220
ME1T-2405D	24 [21.6~26.4]	±5	±100	82	±1200
ME1T-2409D		±9	±56	83	±470
ME1T-2412D		±12	±42	83	±220
ME1T-2415D		±15	±34	83	±220
ME1T-2424D		±24	±21	85	±100

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=3.3\text{V}$ $V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-	370 230 99 80 51	-	mA
Input current No load		-	6	-	mA
Reflected Ripple Current		-	15	-	mA
Surge voltage 1 second max	$V_{IN}=3.3\text{V}$ $V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-0.7 -0.7 -0.7 -0.7 -0.7	-	5 9 18 21 30	VDC
Output voltage accuracy	All models	Refer to graphic in "Characteristic Curves" section			
Line regulation For $V_{IN}$ change of $\pm 1\%$	$V_{OUT}=\pm 3.3\text{V}$ All others	-	-	$\pm 1.5$ $\pm 1.2$	%
Load regulation [1] $I_{OUT}=10\%$ to $100\%$ of $I_{OUT, rated}$	$V_{OUT}=\pm 3.3\text{V}$ $V_{OUT}=\pm 5\text{V}$ All others	-	15 10 7	20 15 10	%
Temperature coefficient	Full load	-	$\pm 0.02$	-	%/ $^{\circ}\text{C}$
Output ripple and noise	20MHz bandwidth		60	150	mVp-p
Output short circuit protection		Continuous, automatic recovery			

### Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input filter		Capacitor			
Hot plug		None			

Note [1]: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured. Dual output models need to operate with balanced load. The load difference between two outputs over 10% may cause unstable operating of the converter.


### General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
<b>Isolation voltage</b> 1 minute, leakage current <1mA	Input to Output	1500	-	-	VDC
<b>Isolation resistance</b> Tested at 500VDC	Input to Output	1000	-	-	M ohm
<b>Isolation capacitance</b> 100KHz, 0.1V	Input to Output	-	20	-	pF
<b>Switching frequency</b>	Full load	-	220	-	KHz
<b>Operating temperature</b>	See "Derating Curve"	-40	-	+105	$^{\circ}\text{C}$
<b>Storage temperature</b>		-55	-	+125	$^{\circ}\text{C}$
<b>Temperature rise at case</b>	Full load	-	25	-	$^{\circ}\text{C}$
<b>Storage humidity</b>	Non-condensing	5	-	95	%RH
<b>Reflow soldering temperature</b>		Peak temp. 217 - 245 $^{\circ}\text{C}$ , maximum duration 60s			
<b>Case material</b>		Black plastic UL94-V0			
<b>Cooling method</b>		Free air convection			
<b>Vibration</b>		10-150Hz, 5G, 0.75mm along X, Y and Z			
<b>Moisture sensitivity level [MSL]</b>		IPC/JEDEC J-STD-020D.1 Level 1			
<b>MTBF</b>	MIL-HDBK-217F	>3,500,000 Hours, $T_A=25^{\circ}\text{C}$			
<b>Safety standards</b>		UL/EN/IEC 62368-1			
<b>EMC standards</b>	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact $\pm 4\text{kV}$ , Air $\pm 8\text{kV}$ , perf. Criteria B			
<b>Size &amp; Weight</b>		15.24x11.4x7.25mm, 1.2g Typ.			

## Characteristic Curves


### Output vs Ambient Temperature

All models

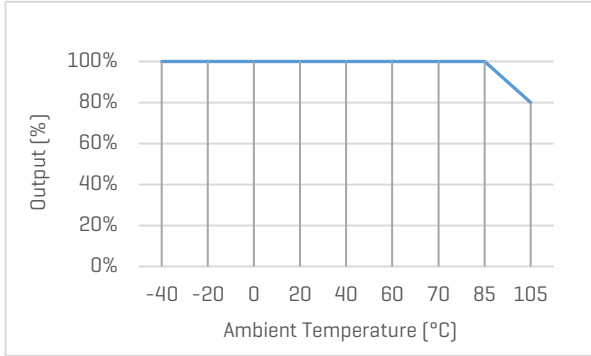


### Output Voltage Accuracy vs Load


3.3V input models, and  $V_{OUT}=3.3V$

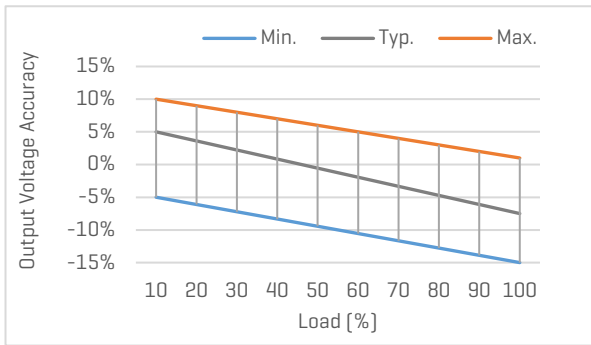


5V input models, and  $V_{OUT}=3.3V$

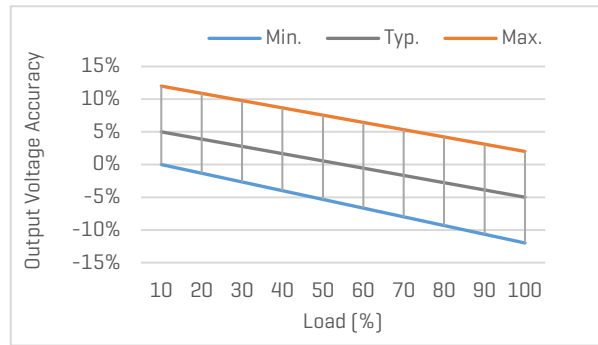

3.3V or 5V input models, and  $V_{OUT}=None$  3.3V

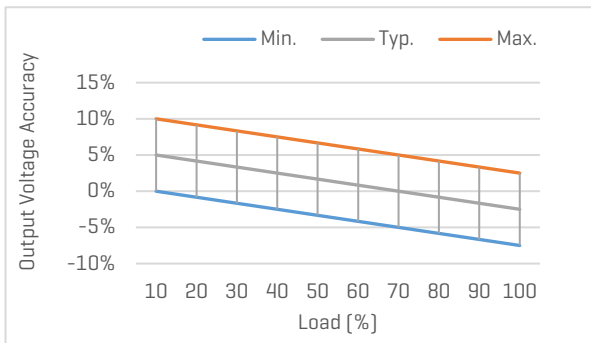

All models with 12, 15, 24V input

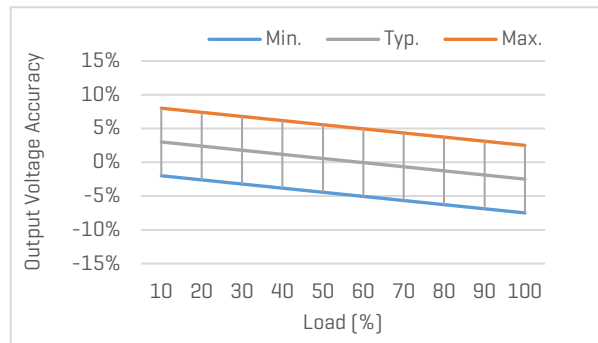


# ME1T-D Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Characteristic Curves


### Efficiency vs Input Voltage

ME1T-0303D, with full Load

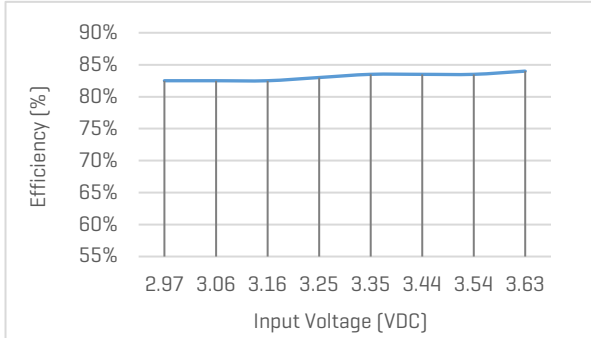

### Efficiency vs Load

ME1T-0303D, with nominal input voltage

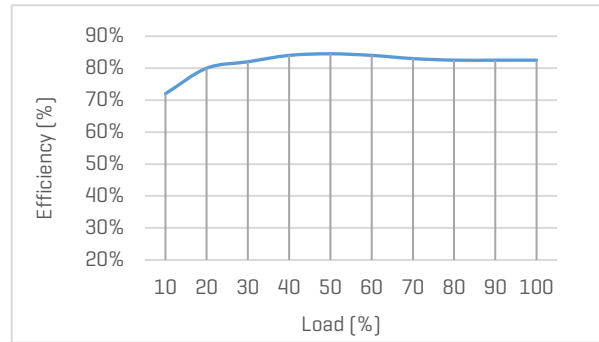


### Efficiency vs Input Voltage

ME1T-0503D, with full Load




### Efficiency vs Load

ME1T-0503D, with nominal input voltage

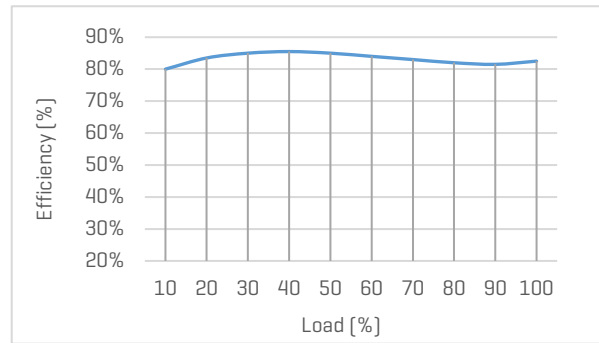


### Efficiency vs Input Voltage

ME1T-1205D, with full Load

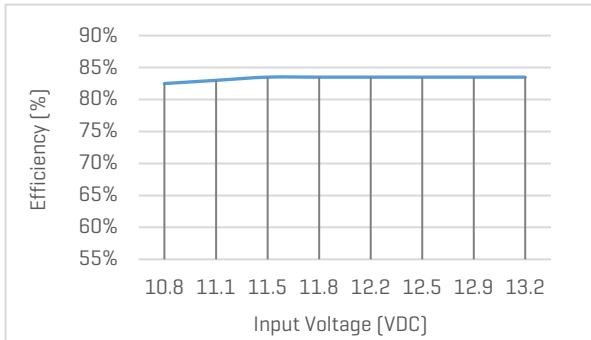

### Efficiency vs Load

ME1T-1205D, with nominal input voltage

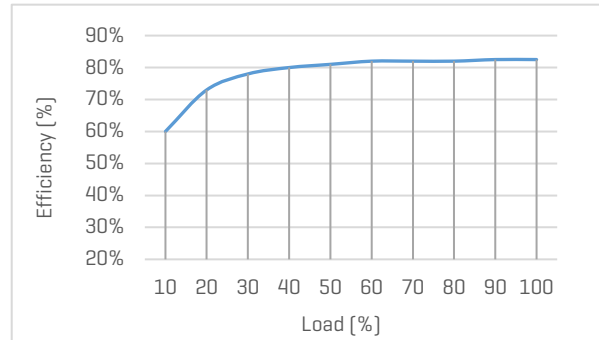

# ME1T-D Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Recommended External Circuit

### Typical Application Circuit

\*Typical application circuit is to further lower the input and output ripple. It is not mandatory.



Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	3.3V	5V	12V	15V	24V
$C_{IN}$	10uF, 16V	4.7uF, 16V	2.2uF, 25V	2.2uF, 25V	1uF, 50V

[Table 2] Recommended component spec

Output voltage	$\pm 3.3, \pm 5V$	$\pm 9V$	$\pm 12V$	$\pm 15V$	$\pm 24V$
$C_{OUT}$	10uF, 16V	2.2uF, 16V	2.2uF, 25V	1uF, 25V	1uF, 50V

### EMC Enhancement for EN55032 Class B

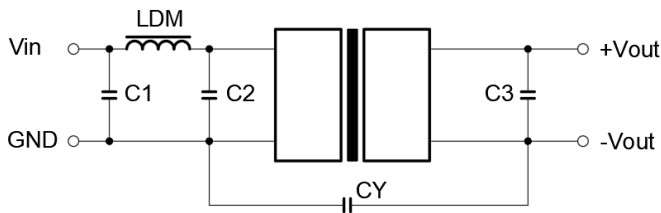


Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec




Component	LDM	C1, C2	CY [3.3...9V <sub>OUT</sub> ]	CY [12...24V <sub>OUT</sub> ]
Spec	6.8uH	4.7uF, 50V	100pF, 2KV	1nF, 2KV

\*C3 Refer to  $C_{OUT}$  in [Table 2]

# ME1T-D Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Mechanical Specifications

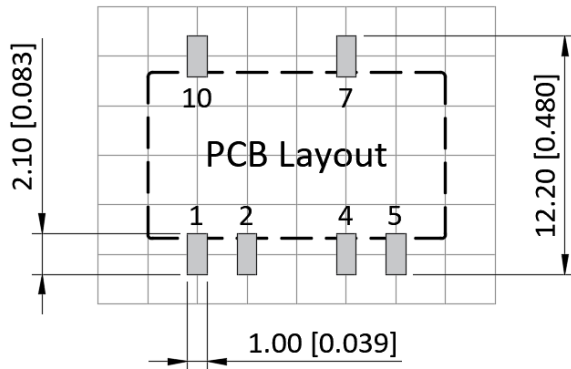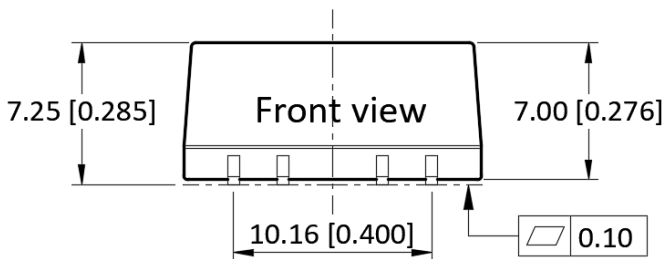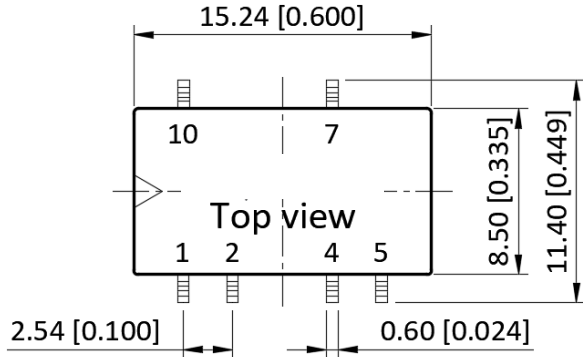

### Pin Definition

Pin #	Dual Out
1	-V <sub>IN</sub>
2	+V <sub>IN</sub>
4	COM
5	-V <sub>OUT</sub>
7	+V <sub>OUT</sub>
10	N/C

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 0.25$  [ $\pm 0.010$ ]

\* Pin thickness:  $\pm 0.10$  [ $\pm 0.004$ ]

\* Footprint grid 2.54 x 2.54 mm

Copyright @ WinkEE Limited. All rights reserved. WinkEE reserves the right to make changes to the product at any time without notice. Information provided by WinkEE is believed to be accurate and reliable. However, no responsibility is assumed by WinkEE for its use, nor for any infringements of patents or other rights of third parties which may result from its use.